


Conduit Fittings Catalog

Catalog CT-30 · 2026 Edition

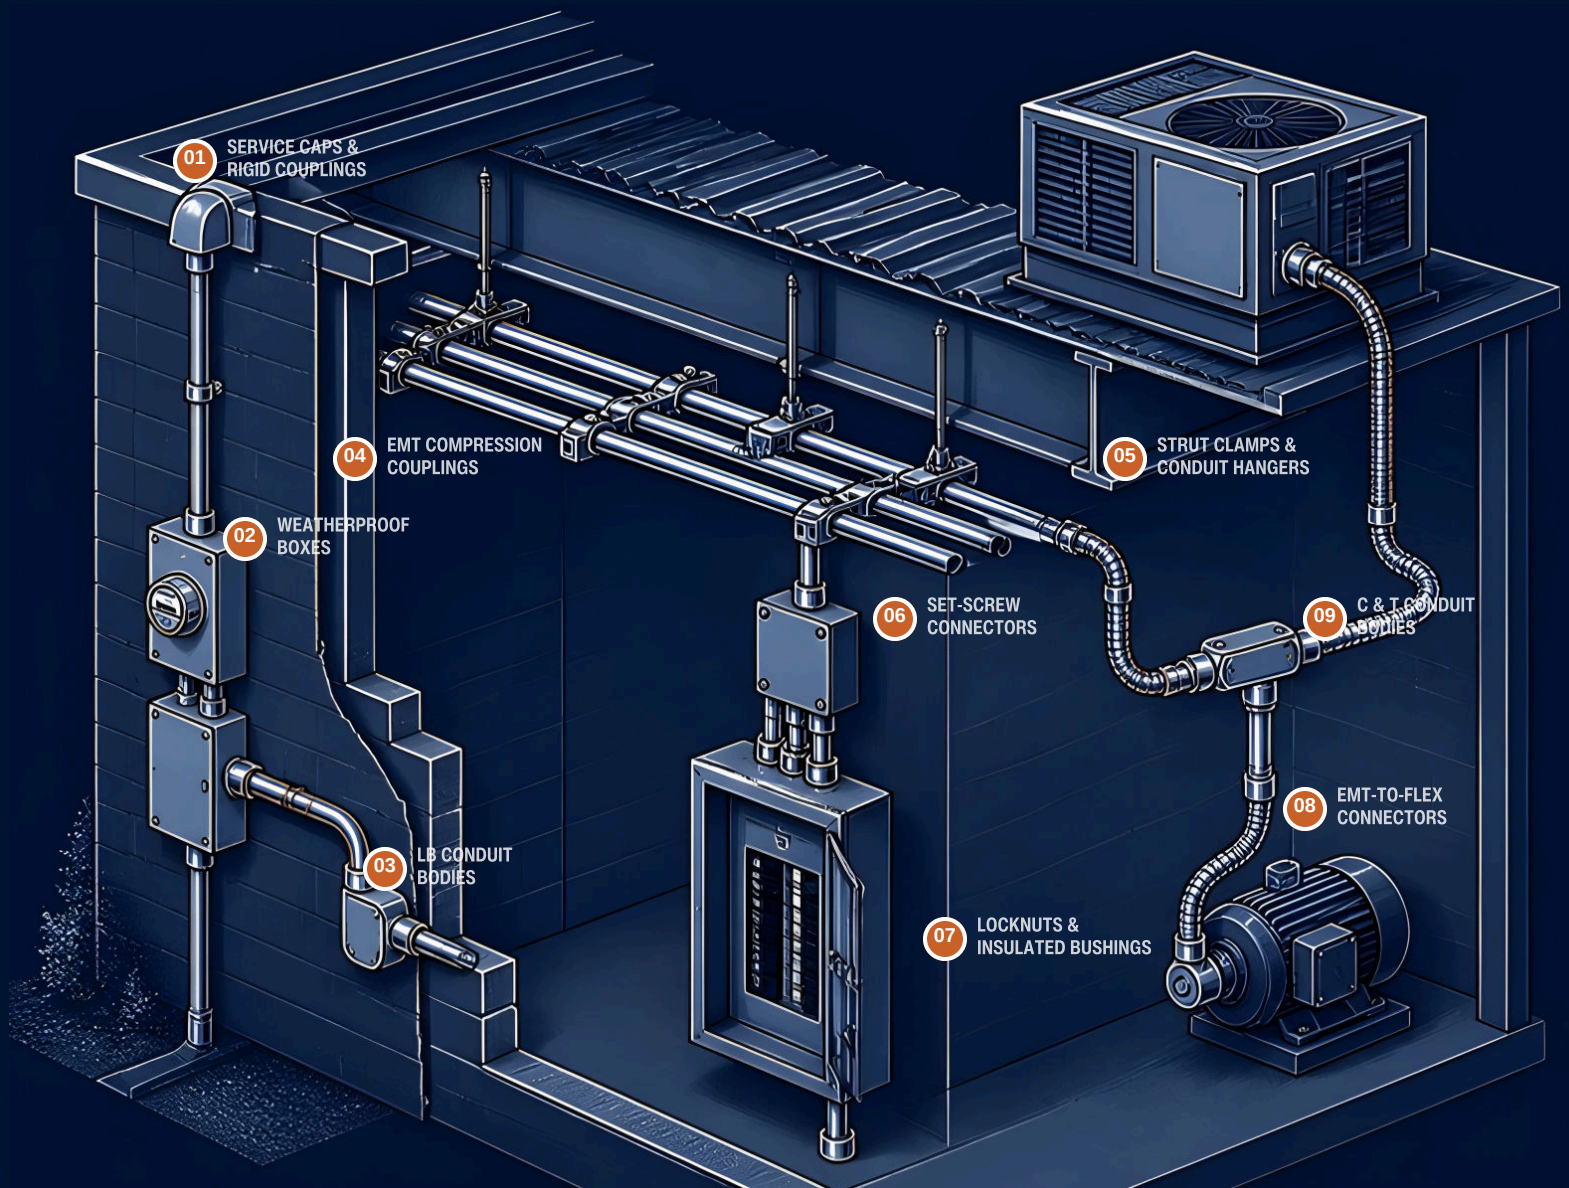

CT-30

Fittings and supports for EMT, IMC, rigid & flex · 3/8 to 3 in. · Same-day shipping on in-stock items · conversionstech.com

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY



Catalog number = store SKU

The number in this book is the number on conversiontech.com, on the box and on the invoice.

EXAMPLE 3125-0034 = EMT set-screw connector, 3/4 in. RTC-75 = rigid threadless coupling, 3/4 in.

TRADE SIZE	METRIC	31XX CODE	LETTER-SERIES CODE
1/2 in.	16	-0012	-050 or -50
3/4 in.	21	-0034	-075 or -75
1 in.	27	-0001	-100
1-1/4 in.	35	-0114	-125
1-1/2 in.	41	-0112	-150
2 in.	53	-0002	-200
2-1/2 in.	63	—	-250
3 in.	78	—	-300



Conduit body codes

Fourth digit sets the body. Last digit sets trade size: 1 = 1/2 in. through 6 = 2 in.

EXAMPLE 675-30002 = LB, threaded, 3/4 in. 677-30013 = C, set-screw, 1 in.

BODY	THREADED, RIGID & IMC	SET-SCREW, EMT
LB	675-3000_	677-3000_
C	675-3001_	677-3001_
LL	675-3002_	677-3002_
LR	675-3003_	677-3003_
T	675-3004_	677-3004_



Crosses in every table

Up to three equivalent numbers print beside each catalog number. Index X-1 works backward from any of them.

BRAND	SECTIONS	CROSSED FOR
Bridgeport	A to F	EMT and rigid fittings, locknuts, conduit bodies, straps
RACO	A to D, F	EMT and rigid fittings, locknuts, bushings, straps
Appleton	D, E	Conduit bodies, grounding bushings
Crouse-Hinds	E	Conduit bodies
O-Z/Gedney	D, E	Conduit bodies, grounding bushings
Arlington	A, B, D	Flex and cable connectors, grounding bushings
Bell	G	Weatherproof boxes
Carlton	A	Non-metallic liquid-tight connectors
Halex	A, C, D, E	Cable connectors, pull elbows, LB bodies, knockout seals
Superstrut	F	Strut clamps
T&B	A	Screw-in flex and liquid-tight connectors
Heyco	G	Cable glands

ORDERING

Quote by catalog number

Order at conversiontech.com or call (307) 206-0534. Most fittings sell each and in packs of 10, 25 and 100; the PACK QTY column lists what is available for every size. Same-day shipping on in-stock items. Email cs@conversiontech.com.
Conversions Tech · Oxnard, CA · Mailing address: 41 S. Wake Forest Ave. #3129, Ventura CA 93003


Contents

SEC.	SECTION	WHAT IS INSIDE	PAGE
ii	How to order	Catalog numbers, size codes, conduit body codes	ii
iii	Contents & fitting selector	Find the right fitting by job and raceway	iii
iv	Choosing the right fitting	Fitting types by location, NEC checkpoints	iv
v	Conduit reference	Trade sizes, ODs, thread, knockouts, support spacing	v
vi	Product finder	Every family by photo, with its page	vi
A	Connectors	EMT, flex, liquid-tight and NM cable connectors	A-1
B	EMT Couplings	Set-screw, compression, EMT-to-flex	B-1
C	Rigid & IMC Fittings	Couplings, threadless, EMT-to-rigid, hubs, nipples, elbows, caps	C-1
D	Locknuts & Bushings	Locknuts, bushings, knockout seals, reducing washers	D-1
E	Conduit Bodies	LB, C, LL, LR and T, threaded 675 and set-screw 677	E-1
F	Straps & Supports	One-hole, two-hole, hangers, strut clamps, malleable	F-1
G	Boxes, Covers & Glands	Die-cast weatherproof boxes, in-use covers, cable glands	G-1
X	Cross-reference index	Competitor number to CT catalog number	X-1
X	Catalog number index	Every catalog number with its page	X-5

Fitting selector

Start with the job and the raceway. The selector points to the family; the section tables give sizes, packs and crosses.

THE JOB	EMT	RIGID & IMC	PAGE
Box entry, dry or damp	Set-screw connector 3125	Hub 3128 or RT connector	A-2, C-3, C-4
Box entry, wet location	Raintight connector 3104	Watertight hub 3128	A-3, C-4
Box entry, concrete pour	Compression connector 3101	RT threadless connector	A-2, C-3
Join two lengths	Coupling 3109 or 3105	Coupling 03xx or RTC	B-2, C-2
Transition to flex	3117 connector, ESC coupling	—	A-5, B-3
Liquid-tight to equipment	LT connector SLT, ALT	LT connector SLT, ALT	A-7
NM or MC cable into a box	RTCC, SCCC, PICC, HLC	—	A-6
Turn or pull point	Set-screw body 677	Threaded body 675, RTR elbow	E-2, C-6
Offset at the box	Offset connector MHZ	Offset nipple OFN	A-4, C-5
Extend or space out	—	Nipples 8381H to 8385H	C-4
Reduce trade size	Reducing washer RW	Reducing bushing RB	D-5, C-5
Close a knockout	Knockout seal KOS	Knockout seal KOS	D-4
Lock to the enclosure	Steel locknut 3111	Rigid locknut LN	D-2
Protect conductors	Insulated throat 3104	Bushing 3114 or CPB	A-3, D-3, D-4
Bond at the service	—	Grounding bushing 3114	D-3
Secure the run	Strap OSP, strut clamp SC	Strap OSP-R, TSP-R, hanger CH	F-2 to F-4
Service mast top	—	Entrance cap EC2	C-6
Outdoor device or cord	Box 210, in-use cover 880	Box 210, in-use cover 880	G-2
Cable into enclosure	Cable gland 9889	Cable gland 9889	G-3



EMT: set-screw, compression or raintight

Pick by location first, then by speed. The listing for each family prints above its table.

FITTING	LOCATIONS	BEST FOR	CATALOG NO.
Set-screw	Dry, damp	Fast indoor box entry	3125, 3109
Compression	Dry, damp	Exposed runs, vibration, concrete	3101, 3105
Raintight compression	Wet	Outdoor and wash-down runs	3104
Push-in, hit-lock	Dry	NM cable into boxes	PICC, HLC



Rigid and IMC: threaded or threadless

Threadless fittings must be made up tight, and concrete-tight or wet-location rated where installed there (NEC 344.42).

JOINT	WHEN TO USE	CATALOG NO.
Threaded coupling	Full-strength joint on threaded RMC and IMC	0324 to 0331
Threadless coupling	Join field-cut ends with no threading	RTC
Threadless connector	Land a field-cut end on a box	RT
Watertight hub	Threaded entry, wet locations, insulated throat	3128
Reducing bushing	Step a threaded opening down a size	RB



Code checkpoints

2023 NEC quick reference; the adopted code governs. Where data differs, the web listing governs.

CHECKPOINT	REQUIREMENT	NEC	USE
Insulated entry	4 AWG and larger: smooth insulated entry	300.4(G)	3104, 3114, CPB
EMT as ground path	Listed fittings, made up tight	250.118	Sections A, B
Service bonding	Bond around concentric knockouts	250.92(B)	3114
EMT support	Within 3 ft of box, then every 10 ft	358.30	Section F
Splices in bodies	Only in bodies marked with volume	314.16(C)	675, 677
Wet receptacles	In-use cover on wet-location boxes	406.9(B)	880



Materials

MATERIAL	FAMILIES	SECTION
Zinc die-cast	Set-screw and squeeze connectors, set-screw couplings	A, B
Zinc-plated steel	Compression fittings, rigid couplings, locknuts	A to D
Hot-dip galvanized steel	Rigid nipples	C
Copper-free aluminum	Conduit bodies	E
Electro-galvanized steel	One-hole and two-hole straps, hangers	F
Malleable iron, zinc plated	Malleable straps, clamp backs	F
Nylon	NPT cable glands	G



Trade size reference

EMT per ANSI C80.3, rigid per ANSI C80.1. Fits OD in the connector tables is the EMT outside diameter.

IMC shares rigid trade sizes and NPT thread. KNOCKOUT is the nominal punched hole diameter.

TRADE SIZE	METRIC	EMT OD / ID (IN.)	RIGID OD (IN.)	NPT TPI	KNOCKOUT (IN.)
1/2 in.	16	0.706 / 0.622	0.840	14	0.875
3/4 in.	21	0.922 / 0.824	1.050	14	1.109
1 in.	27	1.163 / 1.049	1.315	11-1/2	1.375
1-1/4 in.	35	1.510 / 1.380	1.660	11-1/2	1.734
1-1/2 in.	41	1.740 / 1.610	1.900	11-1/2	1.984
2 in.	53	2.197 / 2.067	2.375	11-1/2	2.469
2-1/2 in.	63	2.875 / 2.731	2.875	8	3.000
3 in.	78	3.500 / 3.356	3.500	8	3.625



Support spacing

Maximum distance between supports. NEC 358.30 (EMT), Table 344.30(B)(2) (RMC, IMC straight runs).

TRADE SIZE	EMT	RMC & IMC, STRAIGHT	FROM BOX OR BODY
1/2 to 3/4 in.	10 ft	10 ft	3 ft
1 in.	10 ft	12 ft	3 ft
1-1/4 to 1-1/2 in.	10 ft	14 ft	3 ft
2 to 2-1/2 in.	10 ft	16 ft	3 ft
3 in. and larger	10 ft	20 ft	3 ft



Conduit body key

Name the body by where the outlet sits when you face the cover with the hub at the bottom.

BODY	OPENING	TYPICAL USE
LB	Back, opposite the cover	Turn through a wall
C	Straight through, both ends	Pull point on a straight run
LL	Left side, facing the cover	Turn left along a wall or ceiling
LR	Right side, facing the cover	Turn right along a wall or ceiling
T	Three-way branch	Tap a branch off a run

FIELD NOTE

Cut square, ream every end

Cut EMT, rigid and IMC square, then ream the inside edge so conductors pull over a smooth end (NEC 358.28, 344.28). Make up threaded joints wrench-tight; a loose joint is a break in the equipment grounding path.



EMT Set-Screw Connectors

Zinc die-cast · 1/2 to 2 in. · 6 items

A-2



EMT Compression Couplings

Zinc-plated steel · 1/2 to 2 in. · 6 items

B-2



EMT Compression Connectors

Zinc-plated steel · 1/2 to 2 in. · 6 items

A-2



EMT to Flex Combination Couplings

Zinc die-cast · 3/4 to 1 in. · 2 items

B-3



EMT Raintight Connectors, Insulated

Zinc-plated steel · 1/2 to 2 in. · 6 items

A-3



Rigid Conduit Couplings, Threaded

Zinc-plated steel · 1/2 to 3 in. · 7 items

C-2



EMT Squeeze Connectors

Zinc die-cast · 1/2 to 2 in. · 6 items

A-3



Rigid Threadless Couplings

Zinc-plated steel · 1/2 to 2 in. · 6 items

C-2



90° Flex Squeeze Connectors

Zinc die-cast · 3/4 to 1-1/4 in. · 3 items

A-4



Rigid Threadless Connectors

Zinc-plated steel · 1/2 to 2 in. · 6 items

C-3



EMT Offset Connectors

Zinc die-cast · 1/2 to 1 in. · 3 items

A-4



EMT to Rigid/IMC Connectors

Zinc-plated steel · 3/4 to 2 in. · 4 items

C-3



EMT to Flex Set-Screw Connectors

Steel / zinc die-cast · 1/2 to 3/4 in. · 2 items

A-5



Rigid Watertight Hubs

Zinc die-cast · 1/2 to 2 in. · 6 items

C-4



Screw-In Flex Connectors and Couplings

Zinc die-cast · 3/4 to 1 in. · 4 items

A-5



Rigid Conduit Nipples, HDG

Hot-dip galv. steel · 19 items

C-4



Push-In and Hit-Lock Cable Connectors

Thermoplastic · 1/2 to 3/4 in. · 3 items

A-6



Offset Nipples, Box to Box

Zinc die-cast · 3/4 to 2 in. · 5 items

C-5



NM and Combination Cable Connectors

Zinc die-cast · 3/8 to 2 in. · 7 items

A-6



Reducing Bushings

Zinc-plated steel · 3 items

C-5



Liquid-Tight Connectors, Non-Metallic

Nylon · 1/2 to 1 in. · 6 items

A-7



Pull Corner Elbows, Rigid

Zinc die-cast · 3/4 to 1 in. · 2 items

C-6



Liquid-Tight Connectors, Insulated

Zinc die-cast · 3/4 and 1-1/4 in. · 2 items

A-7



Service Entrance Caps, Clamp-On

Die-cast metal · 1-1/4 to 2-1/2 in. · 3 items

C-6



EMT Set-Screw Couplings

Zinc die-cast · 1/2 to 2 in. · 6 items

B-2



Rigid Locknuts, 2-1/2 and 3 in.

Zinc-plated steel · 2-1/2 to 3 in. · 2 items

D-2



Conduit Locknuts, Steel
Zinc-plated steel · 1/2 to 2 in. · 6 items

D-2



LR Conduit Bodies, Set-Screw (677)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-5



Conduit Bushings
Zinc-plated steel · 1/2 to 2 in. · 6 items

D-3



T Conduit Bodies, Threaded (675)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-6



Insulated Grounding Bushings
Zinc die-cast · 1/2 to 2 in. · 6 items

D-3



T Conduit Bodies, Set-Screw (677)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-6



Insulated Plastic Bushings
Thermoplastic · 1/2 to 2-1/2 in. · 7 items

D-4



EMT One-Hole Straps
Electro-galv. steel · 1/2 to 2 in. · 6 items

F-2



Knockout Seals
Pre-galvanized steel · 1/2 to 2 in. · 5 items

D-4



Rigid One-Hole Straps
Electro-galv. steel · 1/2 to 2 in. · 6 items

F-2



Reducing Washers
Pre-galvanized steel · 5 items

D-5



Rigid Two-Hole Straps
Electro-galv. steel · 1-1/4 to 2-1/2 in. · 3 items

F-3



LB Conduit Bodies, Threaded (675)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-2



Conduit Hangers, Bolt & Nut
Electro-galv. steel · 1/2 to 2 in. · 6 items

F-3



LB Conduit Bodies, Set-Screw (677)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-2



Strut Clamps, EMT & Rigid
Electro-galv. steel · 1/2 to 3 in. · 8 items

F-4



C Conduit Bodies, Threaded (675)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-3



Malleable Straps and Clamp Backs
Malleable iron, steel · 1/4 to 3/4 in. · 3 items

F-4



C Conduit Bodies, Set-Screw (677)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-3



Weatherproof Boxes, Die-Cast Aluminum
Die-cast aluminum · 7 items

G-2



LL Conduit Bodies, Threaded (675)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-4



Weatherproof Boxes and Covers
Die-cast metal · 6 items

G-2



LL Conduit Bodies, Set-Screw (677)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-4



NPT Cable Glands, Nylon
Nylon (PA-6) · 1/2 to 2 in. · 9 items

G-3




LR Conduit Bodies, Threaded (675)
Copper-free aluminum · 1/2 to 2 in. · 6 items

E-5

Connectors

Section A · Box & Panel Entries

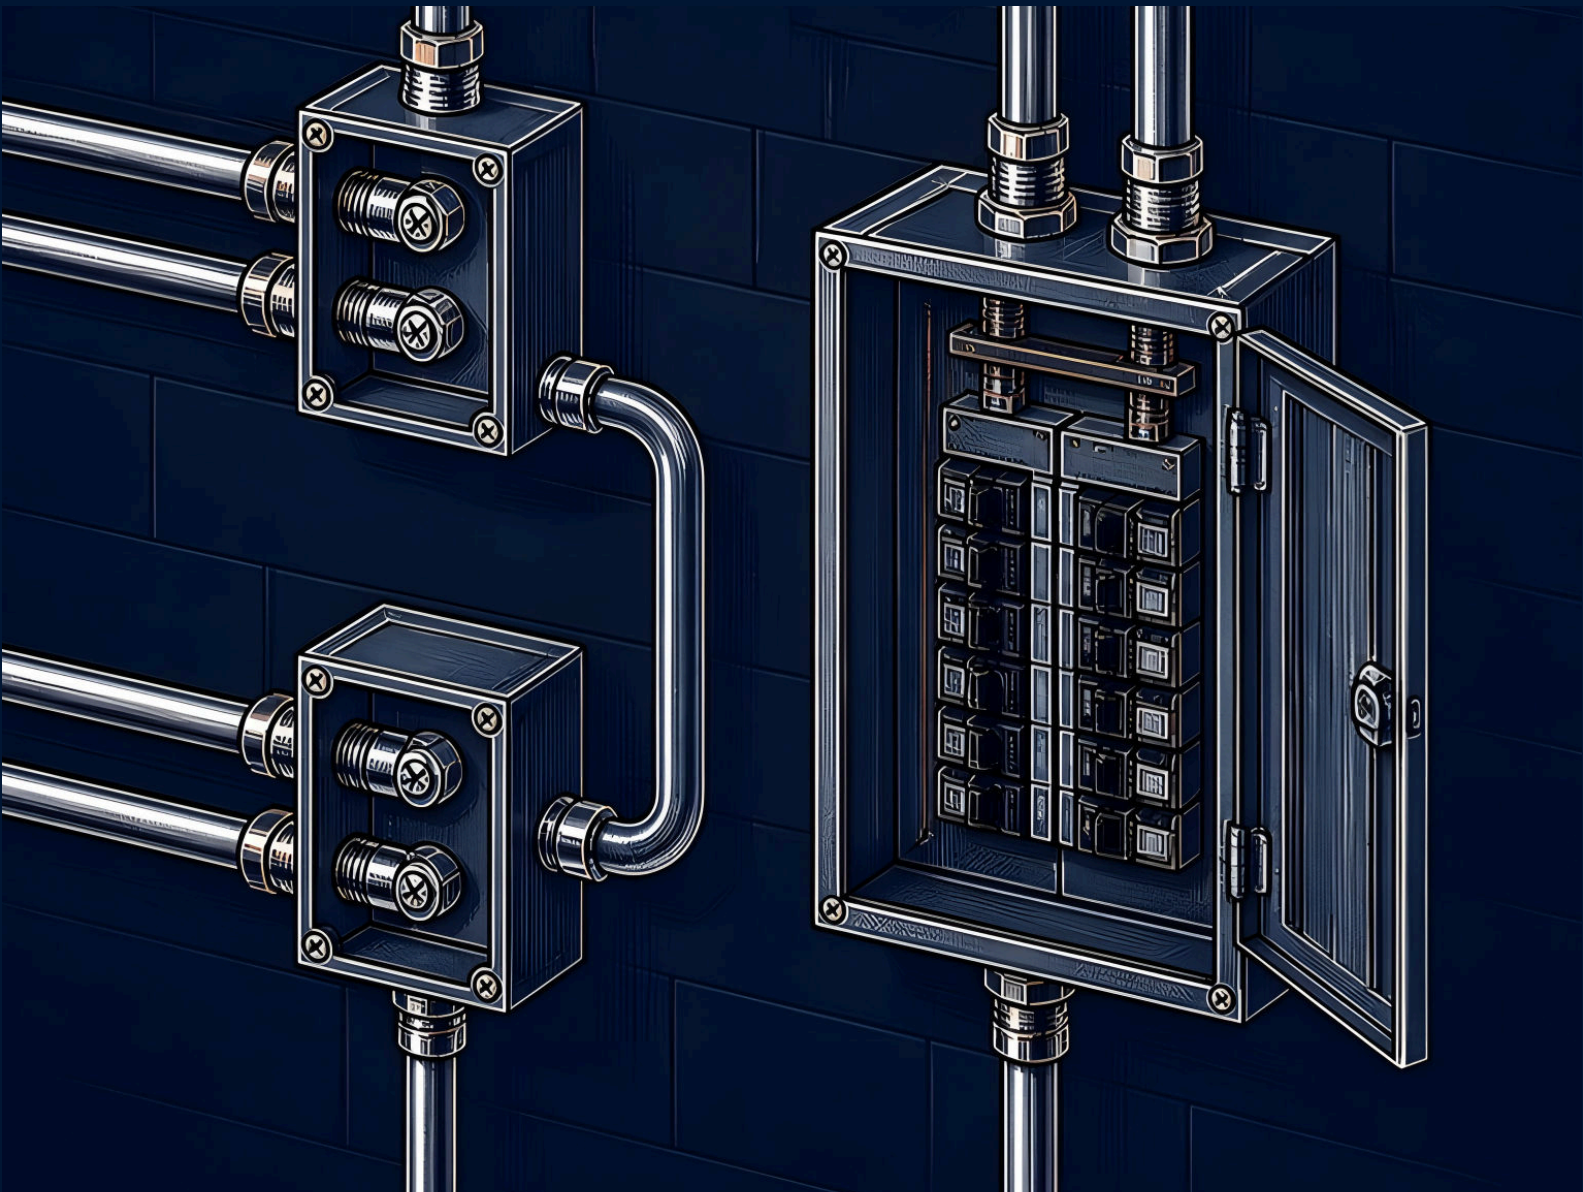

CT-30

Set-screw · Compression · Raintight · Squeeze · Flex · Liquid-tight · NM cable · 3/8 to 2 in.

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

EMT Set-Screw Connectors

The fastest box entry for dry and damp indoor EMT runs.

UL 514B LISTED

CONCRETE-TIGHT

DRY AND DAMP LOCATIONS



FEATURES


- Zinc die-cast body
- Set screw bites the EMT wall
- 1/2 to 2 in. trade sizes
- Packs of 1, 10, 25 and 100

MATERIAL Zinc die-cast LISTING UL 514B · Concrete-tight · Dry and damp locations

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3125-0012	1/2 in.	0.706	1 / 10 / 25 / 100	2602	230-DC2
3125-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2603	231-DC2
3125-0001	1 in.	1.163	1 / 10 / 25 / 100	2604	232-DC2
3125-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	2605	233-DC2
3125-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	2606	234-DC2
3125-0002	2 in.	2.197	1 / 10 / 25 / 100	2608	235-DC2

WHERE IT INSTALLS

- Indoor branch and feeder runs above ceilings and in walls
- Panel, box and enclosure entries where speed matters
- Dry and damp areas; use raintight fittings when wet



EMT Compression Connectors

Pull-out strength for exposed runs, pours and vibration.

ZINC-PLATED STEEL

UL 514B LISTED

CONCRETE-TIGHT



FEATURES


- Zinc-plated steel body
- Gland nut compresses on EMT
- Concrete-tight construction
- 1/2 to 2 in. trade sizes

MATERIAL Zinc-plated steel LISTING UL 514B · Concrete-tight

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3101-0012	1/2 in.	0.706	1 / 10 / 25 / 100	2902	250
3101-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2903	251
3101-0001	1 in.	1.163	1 / 10 / 25 / 100	2904	252
3101-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	2905	253
3101-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	2906	254
3101-0002	2 in.	2.197	1 / 10 / 25 / 100	2908	255-S

WHERE IT INSTALLS

- Exposed indoor runs and runs poured in concrete
- Equipment and enclosures subject to vibration
- Where pull-out strength matters more than speed



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



EMT Raintight Compression Connectors, Insulated Throat

Wet-location EMT entries with built-in throat protection.

ZINC-PLATED STEEL

UL 514B LISTED

RAINTIGHT


CONCRETE-TIGHT

MATERIAL Zinc-plated steel LISTING UL 514B · Raintight · Concrete-tight

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3104-0012	1/2 in.	0.706	1	2912RT	250-SRTI
3104-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2913RT	251-SRTI
3104-0001	1 in.	1.163	1	2914RT	252-SRTI
3104-0114	1-1/4 in.	1.510	1	2915RT	253-SRTI
3104-0112	1-1/2 in.	1.740	1	2916RT	254-SRTI
3104-0002	2 in.	2.197	1	2918RT	255-SRTI

WHERE IT INSTALLS

- Rooftop and exterior EMT entering enclosures
- Wash-down and damp industrial areas
- 4 AWG and larger where an insulated throat is required



FEATURES

- Sealing ring for wet locations
- Thermoplastic insulated throat
- Raintight and concrete-tight
- 1/2 to 2 in. trade sizes

EMT Squeeze Connectors

Clamp-on EMT entry where a compression nut cannot turn.

ZINC DIE-CAST


UL 514B LISTED

MATERIAL Zinc die-cast LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3119-0012	1/2 in.	0.706	1 / 10 / 25 / 100	2102	407-DC2
3119-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2103	408-DC2
3119-0001	1 in.	1.163	1 / 10 / 25	2104	—
3119-0114	1-1/4 in.	1.510	1 / 10 / 25	2105	—
3119-0112	1-1/2 in.	1.740	1 / 10 / 25	2106	—
3119-0002	2 in.	2.197	1 / 10 / 25	2108	416-DC2

WHERE IT INSTALLS

- Tight spaces where a compression nut cannot be turned
- Retrofit entries in existing enclosures
- Temporary and modular installations



FEATURES

- Zinc die-cast body
- Clamp screw closes split body
- Straight entry for EMT
- Fits 0.706 to 2.197 in. OD EMT

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



90° Flex Squeeze Connectors

A hard 90° box entry that keeps flex from kinking.

ZINC DIE-CAST

UL 514B LISTED



FEATURES

- Zinc die-cast 90° body
- Squeeze clamp grips the conduit
- For flexible metal conduit (FMC)
- 3/4, 1 and 1-1/4 in. sizes

MATERIAL Zinc die-cast LISTING UL 514B

CATALOG NO.	TRADE SIZE	PACK QTY	RACO	BRIDGEPORT
ASC-075	3/4 in.	1	2693	806-DC2
ASC-100	1 in.	1	2694	807-DC2
ASC-125	1-1/4 in.	1	2695	808-DC2

WHERE IT INSTALLS

- Box entries where a straight connector would kink the run
- Motor, HVAC and equipment drops in tight clearances
- Panel and gutter entries close to a wall or ceiling



EMT Offset Connectors

Lands EMT flush on surface boxes with no field offset.

ZINC DIE-CAST

UL 514B LISTED



FEATURES


- Zinc die-cast body
- Offset built into the fitting
- 1/2, 3/4 and 1 in. sizes
- Fits 0.706 to 1.163 in. OD EMT

MATERIAL Zinc die-cast LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	BRIDGEPORT	RACO
MHZ-50	1/2 in.	0.706	1 / 10 / 25 / 100	1620-DC2	1762
MHZ-75	3/4 in.	0.922	1 / 10 / 25	1621-DC2	1763
MHZ-100	1 in.	1.163	1	1622-DC2	—

WHERE IT INSTALLS

- Boxes mounted proud of the wall with the tube run flat
- Panel entries with a 1/2 in. step
- Short drops where a field offset bend is not wanted



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



EMT to Flex Set-Screw Connectors

STEEL / ZINC DIE-CAST

UL 514B LISTED

Transitions EMT to flex at motors and equipment.




MATERIAL Steel / zinc die-cast LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	BRIDGEPORT	ARLINGTON
3117-0012	1/2 in.	0.706	1 / 10 / 25	281-DC	861
3117-0034	3/4 in.	0.922	1 / 10 / 25	282-DC	862

WHERE IT INSTALLS

- EMT to flex at motors, transformers and vibrating equipment
- Final drops to HVAC units and pumps
- Equipment that must be movable for service



FEATURES

- Set-screw end grips EMT
- Flex end accepts FMC
- 1/2 and 3/4 in. trade sizes
- Fits 0.706 and 0.922 in. OD EMT

Screw-In Flex Connectors and Couplings

ZINC DIE-CAST

UL LISTED

Screw-in connectors and couplings for FMC whips.



MATERIAL Zinc die-cast LISTING UL Listed

CATALOG NO.	TRADE SIZE	TYPE	PACK QTY	BRIDGEPORT	T&B
XC-075	3/4 in.	Connector	1	521-DC2	XC-242
XC-100	1 in.	Connector	1	522-DC2	XC-243
XK-075	3/4 in.	Coupling	1	531-DC	XK-242
XK-100	1 in.	Coupling	1	532-DC	XK-243

WHERE IT INSTALLS

- FMC whips to motors, HVAC units and light fixtures
- Joining or extending existing flex whips
- Repairs where a flex run must be spliced



FEATURES

- Zinc die-cast body
- Screws directly into the flex
- Connectors and couplings
- 3/4 and 1 in. trade sizes

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Push-In and Hit-Lock Cable Connectors

THERMOPLASTIC

UL 514B LISTED

Tool-free NM cable entry for fast rough-in.



FEATURES


- Thermoplastic body
- Snaps into the knockout
- Locking tab holds the sheath
- 1/2 and 3/4 in. knockouts

MATERIAL Thermoplastic LISTING UL 514B

CATALOG NO.	TRADE SIZE	BRIDGEPORT	PACK QTY	HALEX	ARLINGTON
HLC-050	1/2 in.	—	1	27511	NM94
PICC-050	1/2 in.	620-NM	1	27511	NM94
PICC-075	3/4 in.	—	1	27512	NM95

WHERE IT INSTALLS

- Tool-free NM entry into metal or nonmetallic boxes
- Residential and light commercial rough-in
- Old-work boxes where a locknut cannot be reached



NM and Combination Cable Connectors, Clamp Type

ZINC DIE-CAST

UL LISTED

Clamp-type entries for NM and armored cable.



FEATURES


- Zinc die-cast body
- Clamp screws grip the sheath
- 3/8 to 2 in. trade sizes
- 3/8 in. combo takes NM or AC/MC

MATERIAL Zinc die-cast LISTING UL Listed

CATALOG NO.	TRADE SIZE	HALEX	PACK QTY	RACO	BRIDGEPORT
SCCC-038	3/8 in.	—	1	2661	565-DC2
RTCC-050	1/2 in.	—	1	2711	—
RTCC-075	3/4 in.	20512	1	2863	670-DC2
RTCC-100	1 in.	90513	1	2864	672-DC2
RTCC-125	1-1/4 in.	90514	1	—	674-DC2
RTCC-150	1-1/2 in.	05115	1	—	675-DC2
RTCC-200	2 in.	05120	1	—	676-DC2

WHERE IT INSTALLS

- NM cable entries into metal boxes and panels
- Fixture whips and equipment drops
- Larger NM cable sizes into panelboards



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Liquid-Tight Connectors, Non-Metallic

NYLON **UL LISTED**

Corrosion-free nylon entries for liquid-tight conduit.



FEATURES


- 6/6 nylon body
- Straight and 90° styles
- 1/2, 3/4 and 1 in. sizes
- For LFNC and LFMC

MATERIAL Nylon LISTING UL Listed

CATALOG NO.	TRADE SIZE	TYPE	PACK QTY	RACO	BRIDGEPORT
SLT-050N	1/2 in.	Straight	1	4722	430-NMLT
SLT-075N	3/4 in.	Straight	1	4723	431-NMLT
SLT-100N	1 in.	Straight	1	4724	432-NMLT
ALT-050N	1/2 in.	90°	1	4732	470-NMLT
ALT-075N	3/4 in.	90°	1	4733	471-NMLT
ALT-100N	1 in.	90°	1	4734	472-NMLT

WHERE IT INSTALLS

- Outdoor HVAC, pump and motor connections
- Rooftop units and condensers
- Wash-down and corrosive locations



Liquid-Tight Connectors, Insulated Throat

ZINC DIE-CAST **UL LISTED**

Liquid-tight entries that protect conductors on the pull.



FEATURES

- Zinc die-cast body
- Insulated throat
- 1-1/4 in. straight, 3/4 in. 90°
- For liquid-tight metal conduit

MATERIAL Zinc die-cast LISTING UL Listed

CATALOG NO.	TRADE SIZE	TYPE	PACK QTY	RACO	BRIDGEPORT
SLT-125I	1-1/4 in.	Straight	1	3515RAC	433-SLT1
ALT-075I	3/4 in.	90°	1	3543	471-LT12

WHERE IT INSTALLS

- Motor and equipment feeds in wet and damp locations
- Larger conductors that need an insulated throat
- Industrial and rooftop equipment connections



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/emt-connectors

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



EMT Couplings

Section B · Joining EMT Runs

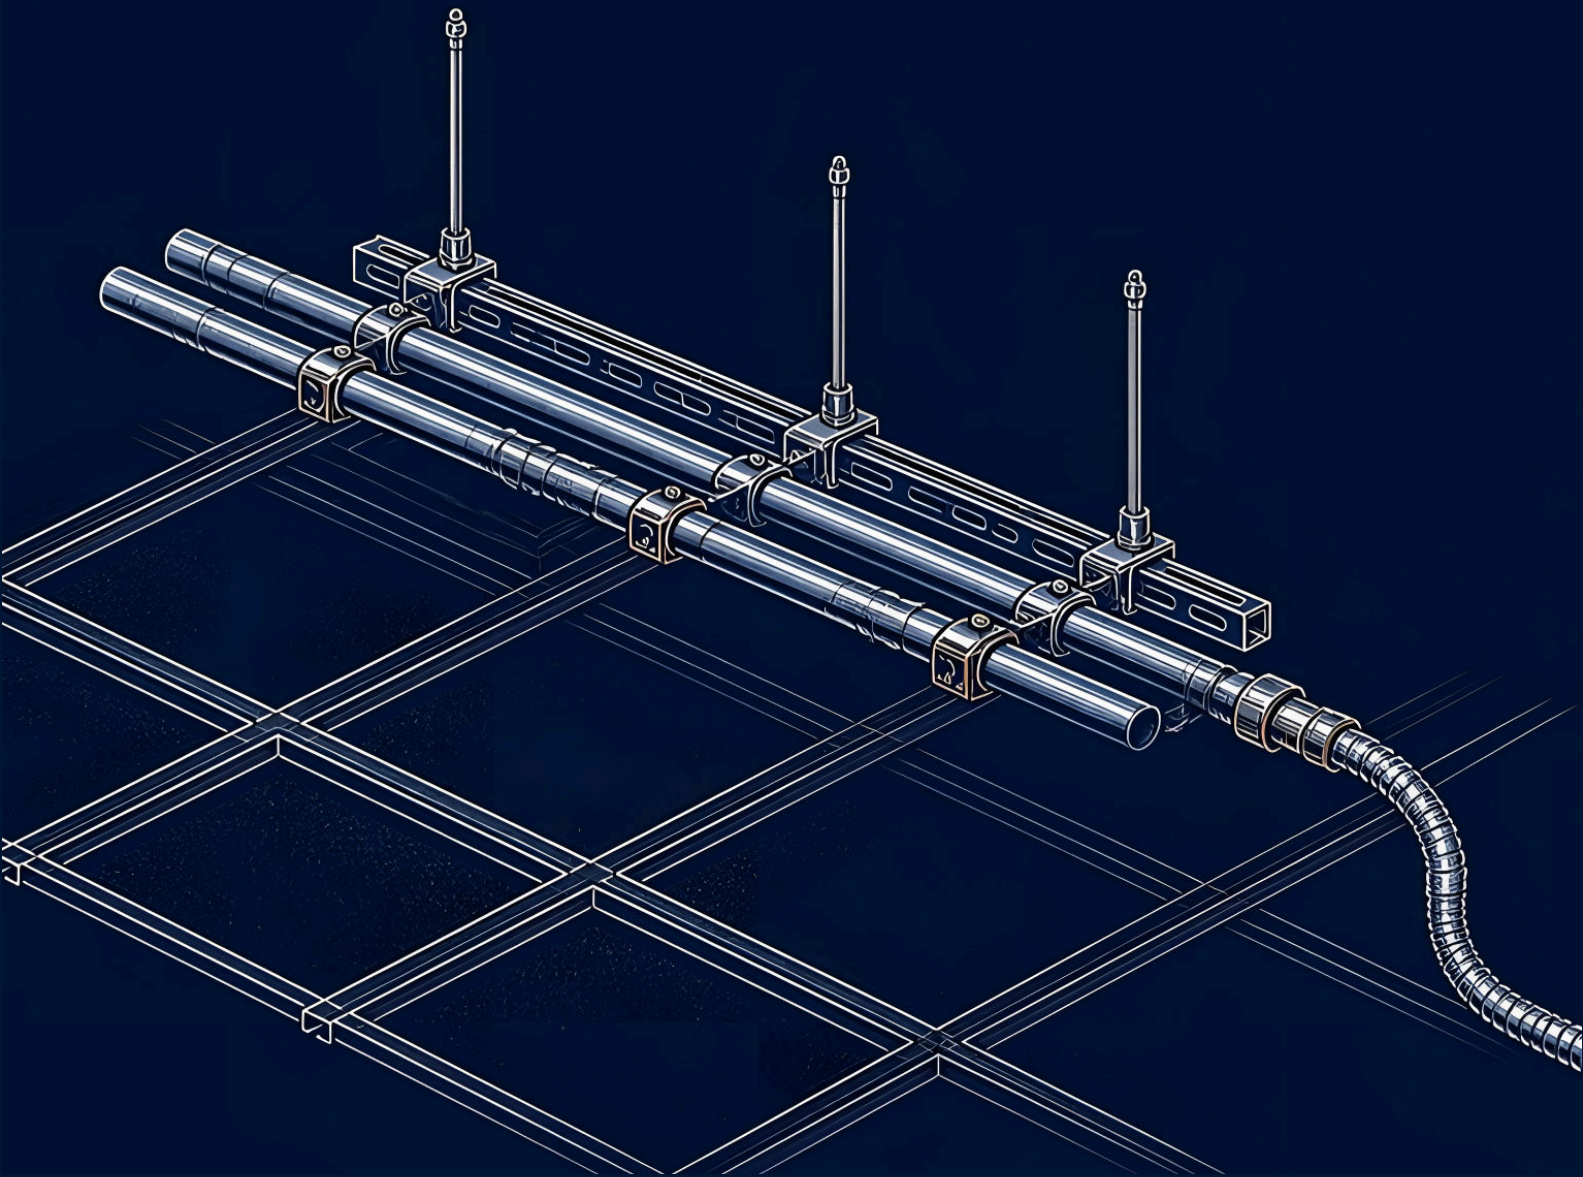

CT-30

Set-screw · Compression · EMT-to-flex combination · 1/2 to 2 in.

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

EMT Set-Screw Couplings

ZINC DIE-CAST

UL 514B LISTED

CONCRETE-TIGHT

DRY AND DAMP LOCATIONS

Fast EMT joints for dry and damp indoor runs.



FEATURES


- Zinc die-cast body
- Set-screw joint for EMT
- 1/2 to 2 in. trade sizes
- Packs of 1, 10, 25 and 100

MATERIAL Zinc die-cast LISTING UL 514B · Concrete-tight · Dry and damp locations

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3109-0012	1/2 in.	0.706	1 / 10 / 25 / 100	2622	240-DC
3109-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2623	241-DC
3109-0001	1 in.	1.163	1 / 10 / 25 / 100	2624	242-DC
3109-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	2625	243-DC
3109-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	2626	244-DC
3109-0002	2 in.	2.197	1 / 10 / 25 / 100	2628	245-DC

WHERE IT INSTALLS

- Joining EMT lengths on indoor runs
- Above-ceiling and in-wall branch circuits
- Concrete pours where marked concrete-tight



EMT Compression Couplings

ZINC-PLATED STEEL

UL 514B LISTED

CONCRETE-TIGHT

A pull-out resistant EMT joint for exposed runs.



FEATURES


- Zinc-plated steel body
- Compression nuts on both ends
- Concrete-tight construction
- 1/2 to 2 in. trade sizes

MATERIAL Zinc-plated steel LISTING UL 514B · Concrete-tight

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3105-0012	1/2 in.	0.706	1 / 10 / 25 / 100	2922	260
3105-0034	3/4 in.	0.922	1 / 10 / 25 / 100	2923	261
3105-0001	1 in.	1.163	1 / 10 / 25 / 100	2924	262
3105-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	2925	263
3105-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	2926	264
3105-0002	2 in.	2.197	1 / 10 / 25	2928	265

WHERE IT INSTALLS

- Exposed indoor runs and concrete pours
- Equipment subject to vibration
- Long pulls where coupling pull-out matters



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-coupling

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



EMT to Flex Combination Couplings

ZINC DIE-CAST

UL 514B LISTED

Joins EMT to flex in one fitting at the equipment.




MATERIAL Zinc die-cast LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	BRIDGEPORT	ARLINGTON
ESC-075	3/4 in.	0.922	1 / 10 / 25 / 100	282-DC	862
ESC-100	1 in.	1.163	1	283-DC	—

WHERE IT INSTALLS

- EMT to flex at motors, transformers and equipment
- Isolating vibration at the last section of a run
- Movable equipment connections




FEATURES

- Zinc die-cast body
- EMT on one end, FMC on the other
- 3/4 and 1 in. trade sizes
- Fits 0.922 and 1.163 in. OD EMT

Couplings matched to the connectors

Same body styles and trade sizes, so a run stays one system from box to box.

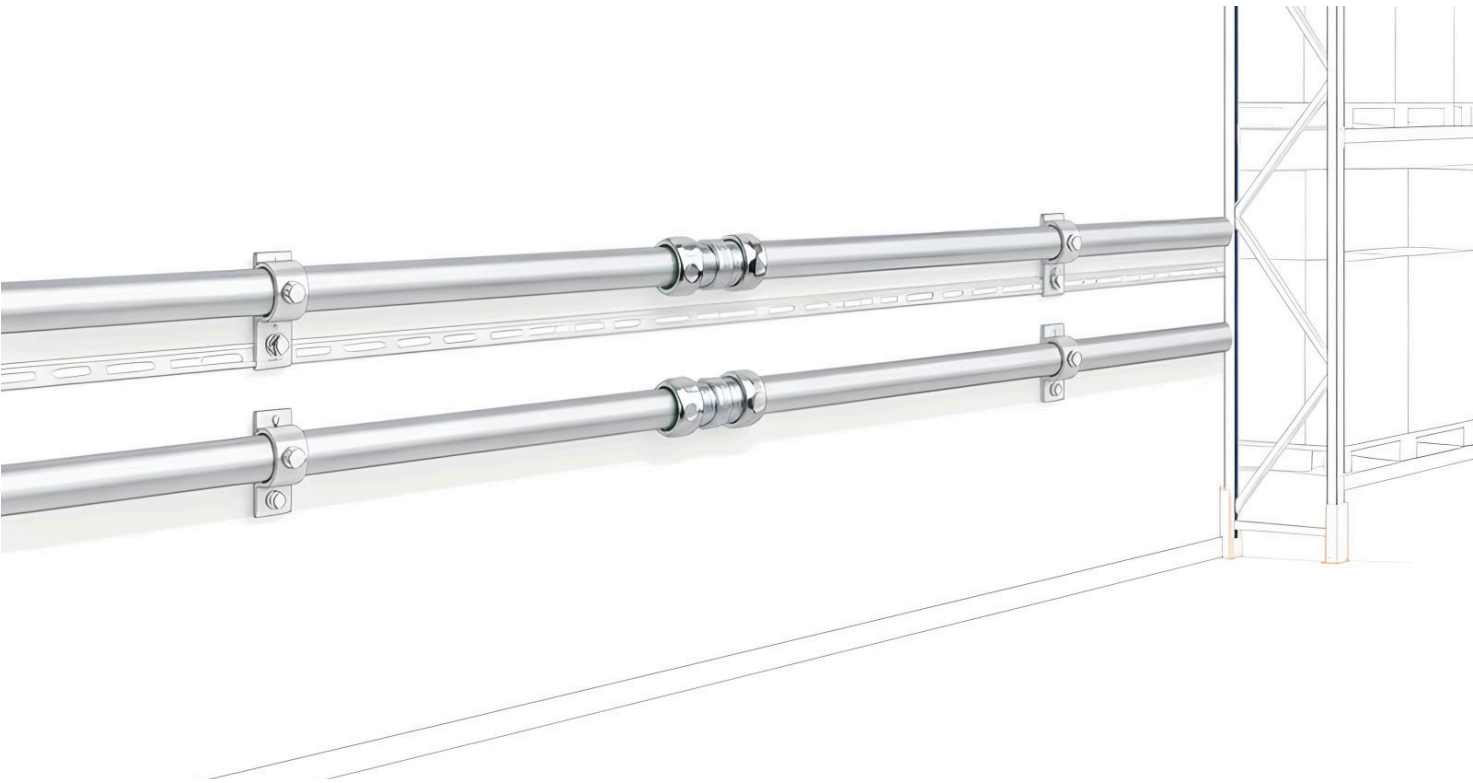

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/emt-coupling

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Rigid & IMC Fittings

Section C · Threaded & Threadless

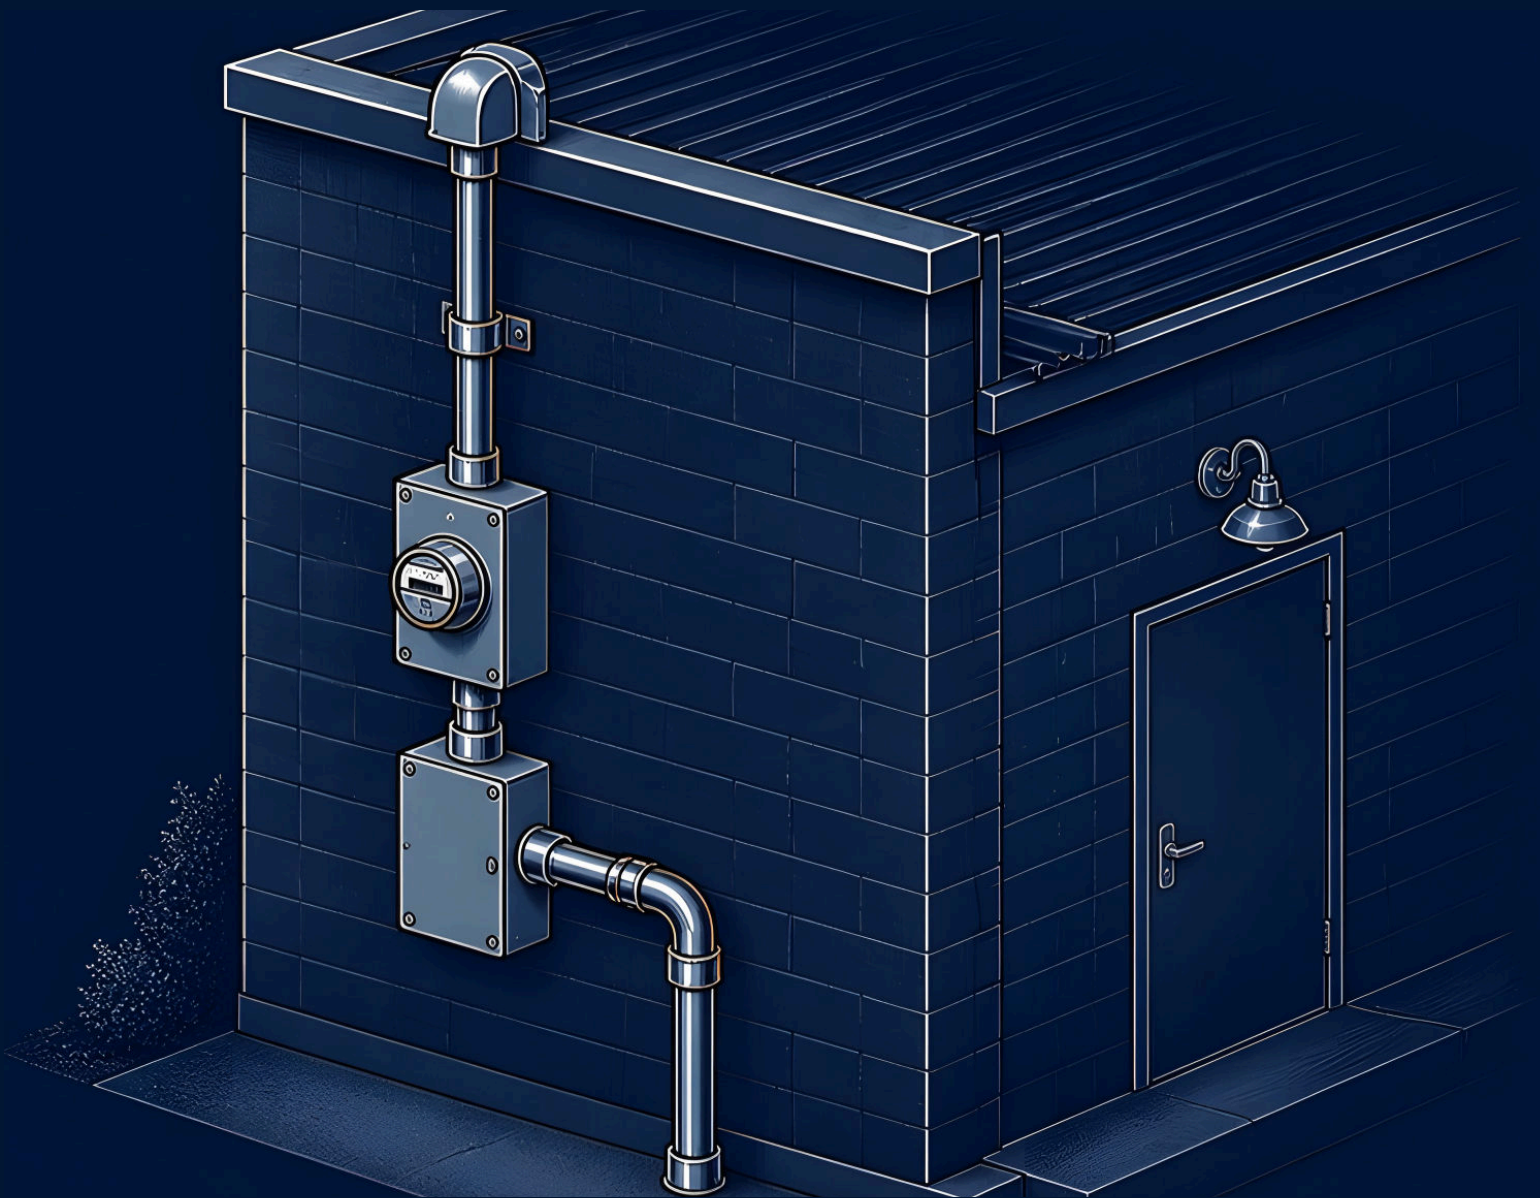

CT-30

Couplings · Compression · Hubs · Nipples · Reducers · Elbows · Service caps

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

Rigid Conduit Couplings, Threaded

Threaded joints for rigid and IMC runs.

UL 6 LISTED

UL 514B LISTED

NPT THREADS



FEATURES


- Zinc-plated steel
- NPT threads
- 1/2 to 3 in. trade sizes
- Fits 0.840 to 3.500 in. OD RMC

MATERIAL Zinc-plated steel LISTING UL 6 · UL 514B · NPT threads

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	BRIDGEPORT	RACO
0324	1/2 in.	0.840	1 / 10 / 25 / 100	1121-SC	1122
0325	3/4 in.	1.050	1 / 10 / 25 / 100	1122-SC	1123
0326	1 in.	1.315	1 / 10 / 25 / 100	1123-SC	1124
0327	1-1/4 in.	1.660	1 / 10 / 25 / 100	1124-SC	1125
0328	1-1/2 in.	1.900	1 / 10 / 25 / 100	1125-SC	1126
0329	2 in.	2.375	1 / 10 / 25	1126-SC	1128
0331	3 in.	3.500	1 / 10	1128-SC	—

WHERE IT INSTALLS

- Joining threaded rigid metal conduit and IMC
- Replacing couplings lost from factory-threaded sticks
- Service masts, exterior and underground rigid runs



Rigid Compression Couplings, Threadless

Joins unthreaded rigid and IMC with no threader on site.

ZINC-PLATED STEEL

UL 514B LISTED

THREADLESS FITTING



FEATURES


- Steel body, zinc plated
- Rings and compression nuts
- 1/2 to 2 in. trade sizes
- Fits 0.840 to 2.375 in. OD RMC

MATERIAL Zinc-plated steel LISTING UL 514B · Threadless fitting

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
RTC-50	1/2 in.	0.840	1 / 10 / 25 / 100	1822	3100
RTC-75	3/4 in.	1.050	1 / 10 / 25	1823	3101
RTC-100	1 in.	1.315	1	1824	3102
RTC-125	1-1/4 in.	1.660	1 / 10 / 25	1825	3103
RTC-150	1-1/2 in.	1.900	1 / 10 / 25	1826	3104
RTC-200	2 in.	2.375	1 / 10	1828	3105

WHERE IT INSTALLS


- Tying into rigid that cannot be turned or threaded
- Repairs and extensions on rigid and IMC runs
- Field-cut joints without a threader on site



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-fittings

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Rigid Compression Connectors, Threadless

Lands unthreaded rigid and IMC on a box or panel.

UL 514B LISTED

THREADLESS FITTING

CONCRETE-TIGHT



FEATURES


- Steel body, zinc plated
- Compression ring and nut
- Concrete-tight, 90°C rated
- 1/2 to 2 in. trade sizes

MATERIAL Zinc-plated steel LISTING UL 514B · Threadless fitting · Concrete-tight

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
RT-50	1/2 in.	0.840	1	1802	3000
RT-75	3/4 in.	1.050	1	1803	3001
RT-100	1 in.	1.315	1	1804	3002
RT-125	1-1/4 in.	1.660	1	1805	3003
RT-150	1-1/2 in.	1.900	1	1806	3004
RT-200	2 in.	2.375	1	1808	3005

WHERE IT INSTALLS

- Existing rigid into a new panel, gutter or box
- Repairs and extensions on rigid and IMC runs
- Concrete-tight entries without a threader on site



EMT to Rigid/IMC Compression Connectors

Changes EMT to threaded rigid or IMC in one fitting.

UL 514B LISTED

CONCRETE-TIGHT



FEATURES


- Zinc-plated steel body
- Compression nut on the EMT end
- Threaded end for RMC and IMC
- 3/4, 1, 1-1/4 and 2 in. sizes

MATERIAL Zinc-plated steel LISTING UL 514B · Concrete-tight

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	BRIDGEPORT	RACO
ERC-075	3/4 in.	0.922	1	291-CDC	1353
ERC-100	1 in.	1.163	1	292-CDC	1354
ERC-125	1-1/4 in.	1.510	1	—	—
ERC-200	2 in.	2.197	1	295-CDC	—

WHERE IT INSTALLS

- Transition from EMT to a threaded rigid or IMC run
- Changing raceway type at a slab, wall or service entry
- Retrofits where existing rigid meets new EMT



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-fittings

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Rigid Watertight Hubs, Insulated Throat

ZINC DIE-CAST WATERTIGHT

Seals threaded rigid entries against rain and washdown.



FEATURES

- Watertight threaded hub
- Insulated throat
- Connects rigid to an enclosure
- 1/2 to 2 in. trade sizes

MATERIAL Zinc die-cast RATING Watertight

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT	RACO
3128-0012	1/2 in.	1	151-DC	1702
3128-0034	3/4 in.	1	152-DC	1703
3128-0001	1 in.	1	153-DC	1704
3128-0114	1-1/4 in.	1	154-DC	1705
3128-0112	1-1/2 in.	1	155-DC	1706
3128-0002	2 in.	1	156-DC	1708

WHERE IT INSTALLS

- Exposed outdoor rigid runs into enclosures
- Industrial areas that need a watertight entry
- Moisture-prone commercial and plant installations



Rigid Conduit Nipples, Hot-Dip Galvanized

HOT-DIP GALV. STEEL UL LISTED UL 6 LISTED

Close through 6 in. nipples for box and equipment ties.



FEATURES


- Hot-dip galvanized
- NPT threads both ends
- 1/2 to 2 in. trade sizes
- Close to 6 in. lengths

MATERIAL Hot-dip galv. steel LISTING UL Listed · UL 6

CATALOG NO.	SIZE × LENGTH	BRIDGEPORT	CATALOG NO.	SIZE × LENGTH	BRIDGEPORT
8381H	1/2 × close	NIP-050CL	83824H	1 × 4 in.	NIP-100400
8381112H	3/4 × 1-1/2 in.	NIP-075150	83825H	1 × 5 in.	—
8381212H	3/4 × 2-1/2 in.	NIP-075250	83826H	1 × 6 in.	NIP-100600
83813H	3/4 × 3 in.	NIP-075300	8383H	1-1/4 × close	NIP-125CL
83814H	3/4 × 4 in.	NIP-075400	83832H	1-1/4 × 2 in.	—
83815H	3/4 × 5 in.	NIP-075500	83833H	1-1/4 × 3 in.	—
83816H	3/4 × 6 in.	NIP-075600	8384H	1-1/2 × close	—
8382H	1 × close	NIP-100CL	8385H	2 × close	NIP-200CL
83822H	1 × 2 in.	—	83853H	2 × 3 in.	NIP-200300
83823H	1 × 3 in.	NIP-100300			

WHERE IT INSTALLS

- Short connections between boxes and equipment
- Outdoor and corrosive environments
- Tight spaces where a longer nipple will not fit



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-fittings

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Offset Nipples, Box to Box

ZINC DIE-CAST

UL LISTED

Gangs enclosures whose knockouts do not line up.



FEATURES


- Zinc die-cast body
- Offset built into the nipple
- Box to box connection
- 3/4 to 2 in. trade sizes

MATERIAL Zinc die-cast LISTING UL Listed

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
OFN-075	3/4 in.	1	1521-DC
OFN-100	1 in.	1	1522-DC
OFN-125	1-1/4 in.	1	1523-DC
OFN-150	1-1/2 in.	1	1524-DC
OFN-200	2 in.	1	1525-DC

WHERE IT INSTALLS

- Joining adjacent boxes with misaligned knockouts
- Control systems and distribution panels
- Retrofits around existing box placements



Reducing Bushings

ZINC-PLATED STEEL

Steps a threaded opening down to a smaller conduit.



FEATURES


- Zinc-plated steel body
- Smaller conduit into larger hub
- Sizes 1 × 3/4 to 2 × 1-1/4
- Crosses Bridgeport and RACO

MATERIAL Zinc-plated steel

CATALOG NO.	SIZE	PACK QTY	BRIDGEPORT	RACO
RB-100075	1 × 3/4 in.	1	1163	1144
RB-125100	1-1/4 × 1 in.	1	1166	1147
RB-200125	2 × 1-1/4 in.	1	1174	1155

WHERE IT INSTALLS

- Size transitions in junction and outlet boxes
- Service entrance size changes
- Connecting fittings of different trade sizes



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-fittings

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Pull Corner Elbows, Rigid

ZINC DIE-CAST UL LISTED

Makes the 90° turn and the pull point in one fitting.




MATERIAL Zinc die-cast LISTING UL Listed

CATALOG NO.	TRADE SIZE	PACK QTY	HALEX	BRIDGEPORT
RTR-075	3/4 in.	1	94107	—
RTR-100	1 in.	1	—	83-DC

WHERE IT INSTALLS

- 90° turns on rigid conduit runs
- Commercial and industrial rigid systems
- Tight corners where routing space is limited



FEATURES

- Zinc die-cast body
- Removable cover at the turn
- Rigid to rigid, 90°
- 3/4 and 1 in. trade sizes

Service Entrance Caps, Clamp-On

DIE-CAST METAL WEATHERPROOF

Weatherhead for the top of the service riser.



MATERIAL Die-cast metal RATING Weatherproof

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
EC2-125	1-1/4 in.	1	1254
EC2-200	2 in.	1	1256
EC2-250	2-1/2 in.	1	1257

WHERE IT INSTALLS

- Residential service entrance risers
- Commercial service entrances
- Overhead service drops to meter sockets



FEATURES

- Clamp-on mounting
- Weatherproof cable entry
- 1-1/4, 2 and 2-1/2 in. sizes
- Residential and commercial use

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/rigid-conduit-fittings

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Locknuts & Bushings

Section D · Bonding & Conductor Protection

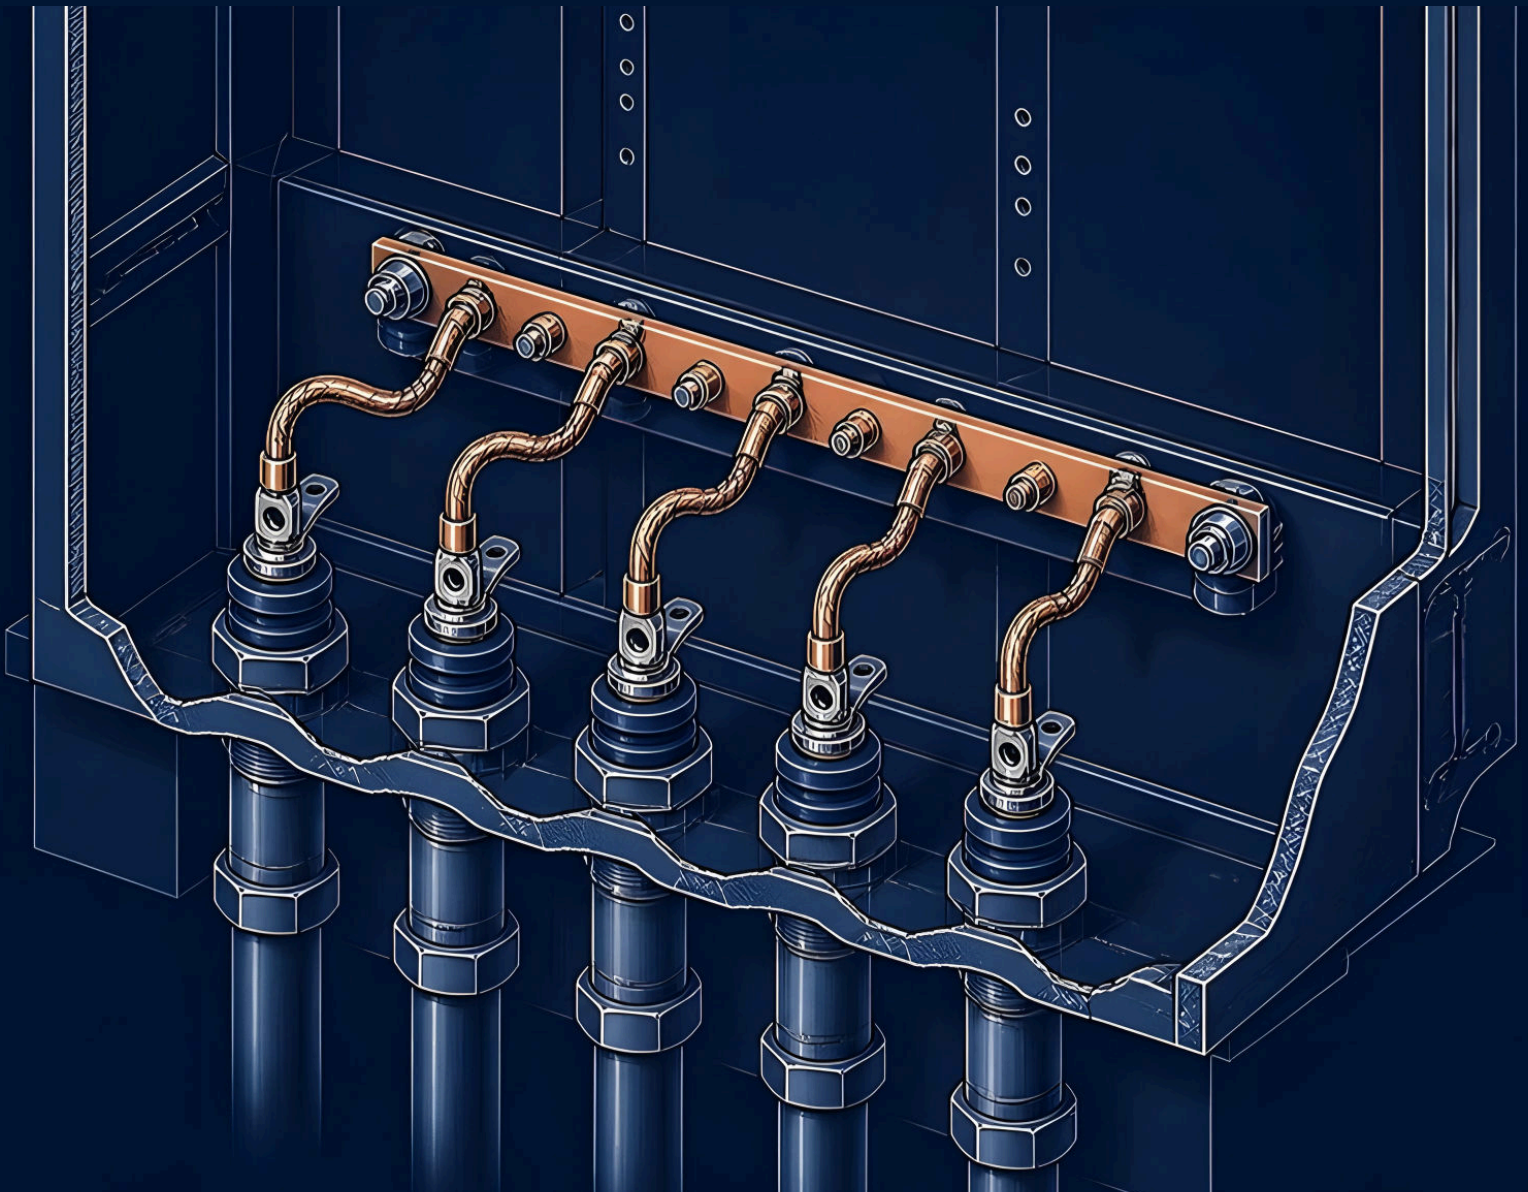

CT-30

Locknuts · Grounding & plastic bushings · Knockout seals · Reducing washers · 1/2 to 3 in.

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

Rigid Locknuts, 2-1/2 and 3 in.

Large-size locknuts for 2-1/2 and 3 in. service entries.

ZINC-PLATED STEEL

UL 514B LISTED



FEATURES


- Zinc-plated steel
- Teeth bite through paint
- 2-1/2 and 3 in. trade sizes
- For RMC, IMC and EMT fittings

MATERIAL Zinc-plated steel LISTING UL 514B

CATALOG NO.	TRADE SIZE	PACK QTY	RACO	BRIDGEPORT
LN-250	2-1/2 in.	1	1010	107-S
LN-300	3 in.	1	1012	108-S

WHERE IT INSTALLS

- Securing connectors, hubs and nipples at the box wall
- Bonding the raceway to the box when run wrench-tight
- Rigid and IMC service and feeder entries



Conduit Locknuts, Steel

The everyday locknut for every connector and nipple.

ZINC-PLATED STEEL

UL 514B LISTED



FEATURES


- Zinc-plated steel
- For EMT, rigid and IMC
- 1/2 to 2 in. trade sizes
- Packs of 1, 10, 25 and 100

MATERIAL Zinc-plated steel LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
3111-0012	1/2 in.	0.706	1 / 10 / 25 / 100	1002	101-S
3111-0034	3/4 in.	0.922	1 / 10 / 25 / 100	1003	102-S
3111-0001	1 in.	1.163	1 / 10 / 25 / 100	1004	103-S
3111-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	1005	104-S
3111-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	1006	105-S
3111-0002	2 in.	2.197	1 / 10 / 25 / 100	1008	106-S

WHERE IT INSTALLS

- Securing connectors and nipples to boxes and panels
- Inside and outside pairs on threaded rigid entries
- Use bonding hardware where 250.92 or 250.97 apply



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-bushing-and-locknuts

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Conduit Bushings

Rounds the conduit end to protect conductor insulation.

ZINC-PLATED STEEL UL 514B LISTED



FEATURES


- Zinc-plated steel
- Smooth rounded throat
- Threads onto conduit ends
- 1/2 to 2 in. trade sizes

MATERIAL Zinc-plated steel LISTING UL 514B

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO
3113-0012	1/2 in.	0.706	1 / 10 / 25 / 100	1102
3113-0034	3/4 in.	0.922	1 / 10 / 25 / 100	1103
3113-0001	1 in.	1.163	1 / 10 / 25 / 100	1104
3113-0114	1-1/4 in.	1.510	1 / 10 / 25 / 100	1105
3113-0112	1-1/2 in.	1.740	1 / 10 / 25 / 100	1106
3113-0002	2 in.	2.197	1 / 10 / 25 / 100	1108

WHERE IT INSTALLS

- Rounding the raceway edge inside the box
- Threaded rigid and IMC entries
- Use insulated bushings for 4 AWG and larger



Insulated Grounding Bushings

Bonds the raceway and protects conductors at the entry.

ZINC DIE-CAST UL 514B LISTED UL 467 LISTED



FEATURES


- 150°C insulated throat
- Lay-in lug, Cu/Al rated
- Fits rigid, IMC and EMT ends
- 1/2 to 2 in. trade sizes

MATERIAL Zinc die-cast LISTING UL 514B · UL 467

CATALOG NO.	TRADE SIZE	ARLINGTON	PACK QTY	BRIDGEPORT	APPLETON
3114-0012	1/2 in.	450	1 / 10 / 25 / 100	381-DC	GIB-50L-4AC
3114-0034	3/4 in.	451	1 / 10 / 25	382-DC	GIB-75L-4AC
3114-0001	1 in.	452	1 / 10 / 25	383-DC	GIB-100L-4AC
3114-0114	1-1/4 in.	453	1 / 10 / 25	384-DC	GIB-125L-4AC
3114-0112	1-1/2 in.	454	1 / 10 / 25	385-DC	GIB-150L-4AC
3114-0002	2 in.	455	1 / 10 / 25	386-DC	GIB-200L-4AC

WHERE IT INSTALLS

- Metal raceways landing at service equipment
- Concentric knockouts over 250 V to ground
- Conductors 4 AWG and larger entering an enclosure



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-bushing-and-locknuts

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Insulated Plastic Bushings

THERMOPLASTIC

Thermoplastic throat protection for threaded conduit.



FEATURES


- Thermoplastic body
- Screws onto threaded conduit
- Smooth rounded throat
- 1/2 to 2-1/2 in. trade sizes

MATERIAL Thermoplastic

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT	RACO
CPB-050	1/2 in.	1	321	1402
CPB-075	3/4 in.	1	322	1403
CPB-100	1 in.	1	323	1404
CPB-125	1-1/4 in.	1	324	1405
CPB-150	1-1/2 in.	1	325	1406
CPB-200	2 in.	1	326	1408
CPB-250	2-1/2 in.	1	327	1410

WHERE IT INSTALLS

- Rigid conduit ends at boxes and enclosures
- Lighting, outlet and switch box entries
- Replacing worn bushings on existing runs



Knockout Seals

PRE-GALVANIZED STEEL

Closes unused knockouts and restores the enclosure.



FEATURES

- Pre-galvanized steel
- Snaps in from outside
- Seats flush in the knockout
- 1/2 to 2 in. trade sizes

MATERIAL Pre-galvanized steel

CATALOG NO.	TRADE SIZE	PACK QTY	RACO	BRIDGEPORT
KOS-050	1/2 in.	1	1042	1691
KOS-075	3/4 in.	1	1043	1692
KOS-100	1 in.	1	1044	1693
KOS-125	1-1/4 in.	1	1045	1694
KOS-200	2 in.	1	1048	1696

WHERE IT INSTALLS

- Closing unused knockouts in boxes, gutters and panels
- Restoring enclosure integrity after a fitting is removed
- Keeping debris and pests out of enclosures



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-bushing-and-locknuts

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Reducing Washers

Lands a smaller fitting in an oversized knockout.

PRE-GALVANIZED STEEL

MATERIAL Pre-galvanized steel

CATALOG NO.	SIZE	PACK QTY	RACO	BRIDGEPORT
RW-100075	1 × 3/4 in.	1	1367	1063
RW-125075	1-1/4 × 3/4 in.	1	1369	1065
RW-125100	1-1/4 × 1 in.	1	1370	1066
RW-200075	2 × 3/4 in.	1	1376	1072
RW-200125	2 × 1-1/4 in.	1	1378	1074




FEATURES

- Pre-galvanized steel
- Used in pairs, inside and out
- Clamped by the fitting locknut
- Sizes 1 × 3/4 to 2 × 1-1/4


WHERE IT INSTALLS

- Landing a smaller fitting in an oversized knockout
- Retrofits where knockouts do not match the roadway
- Panel and gutter entries



Finish every entry right

Locknuts, bushings, seals and washers to bond, protect and close out panels and boxes.

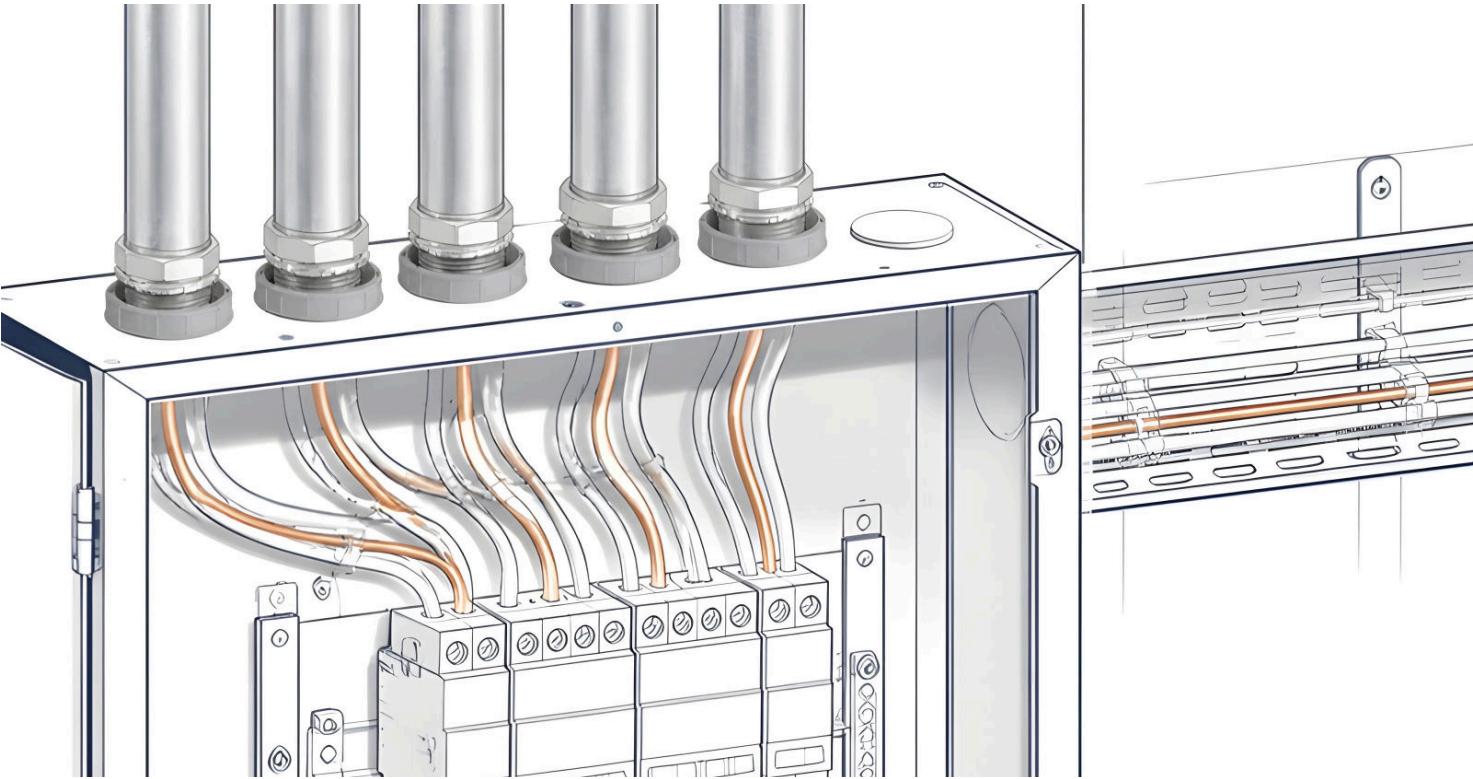

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/emt-bushing-and-locknuts

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Conduit Bodies

Section E · LB, C, LL, LR & T

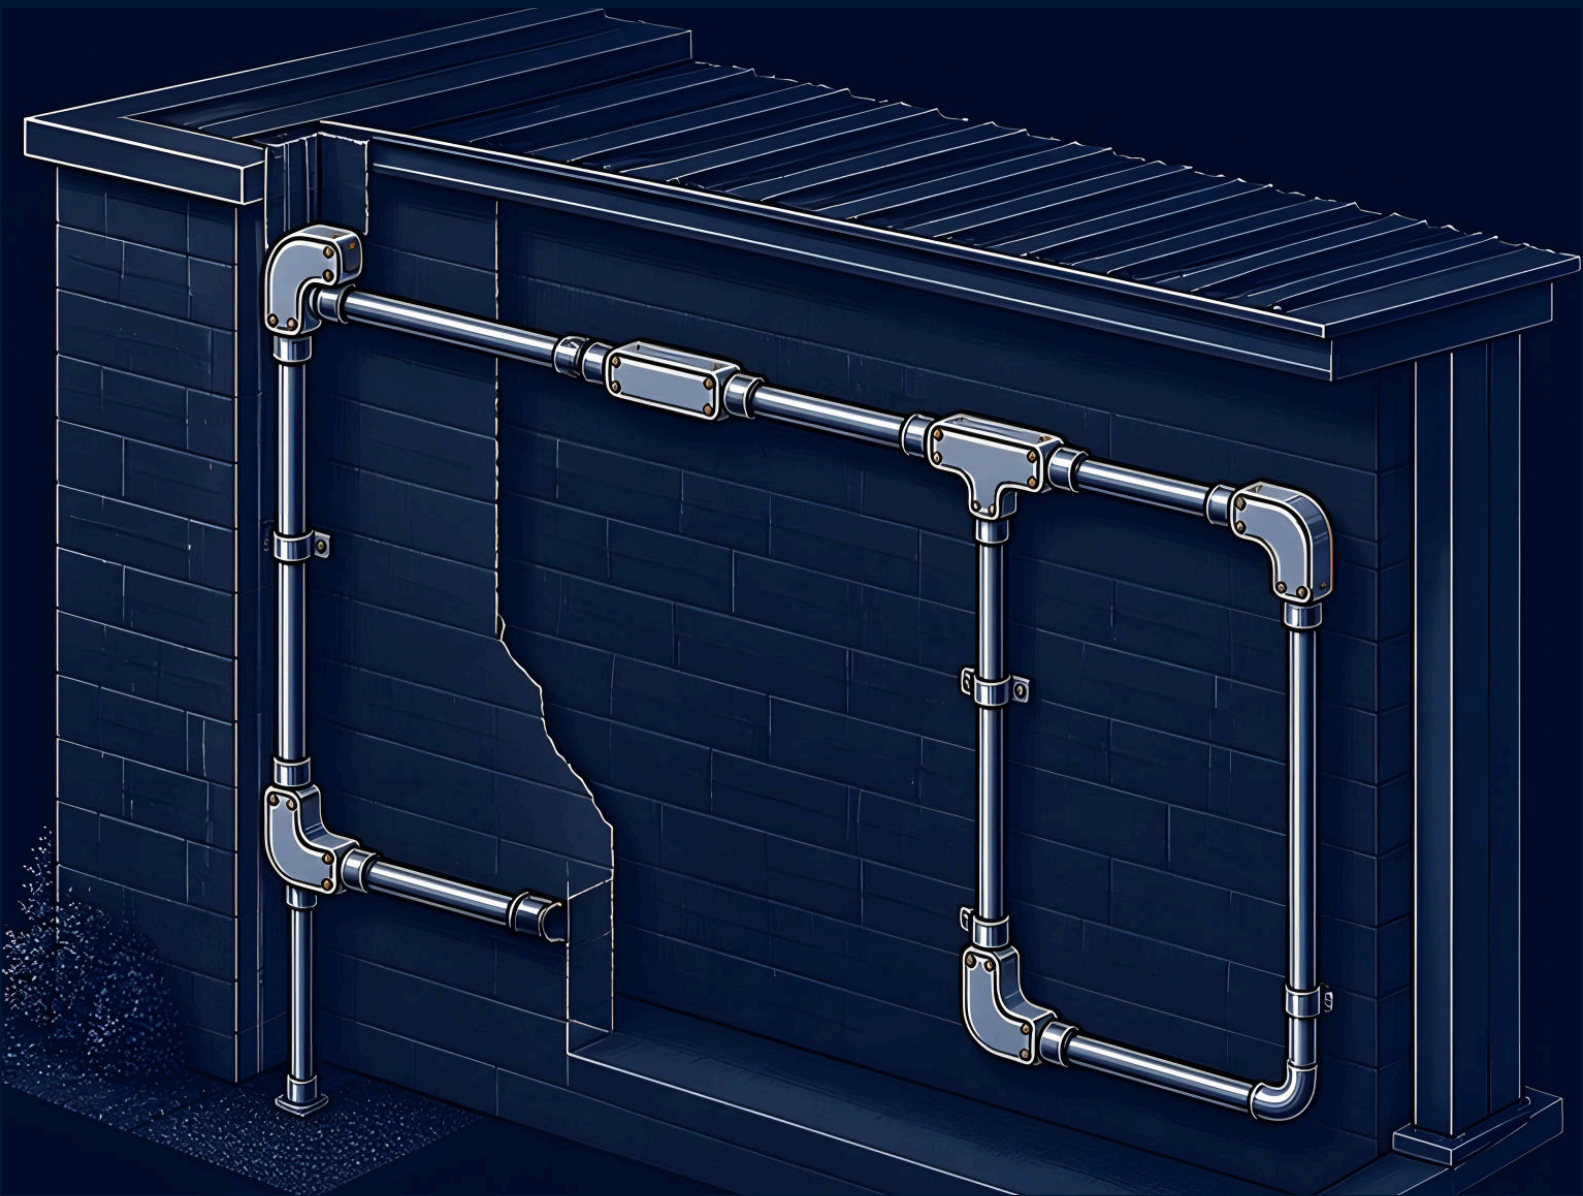

CT-30

Threaded 675 · Set-screw 677 · Copper-free aluminum · Cover & gasket included

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

LB Conduit Bodies, Threaded (675)

COPPER-FREE ALUMINUM

NEMA 3R

UL LISTED

CSA CERTIFIED

LB turns 90° out the back for rigid runs through a wall.



FEATURES

- Second hub opposite the cover
- NPT hubs for RMC and IMC
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	O-Z/GEDNEY	PACK QTY	CROUSE-HINDS	APPLETON
675-30001	1/2 in.	LB17	1 / 10 / 25	LB17	LB17
675-30002	3/4 in.	LB27	1 / 10 / 25	LB27	LB27
675-30003	1 in.	LB37	1 / 10 / 25	LB37	LB37
675-30004	1-1/4 in.	LB47	1 / 10	LB47	LB47
675-30005	1-1/2 in.	LB57	1 / 10	LB57	LB57
675-30006	2 in.	LB67	1	LB67	LB67

WHERE IT INSTALLS

- Exterior rigid and IMC runs passing through a wall
- 90° turns where the run leaves a wall surface
- Pull points at a change of direction



LB Conduit Bodies, Set-Screw (677)

NEMA 3R

UL LISTED

CSA CERTIFIED

LB turns 90° out the back for EMT runs through a wall.



FEATURES


- Second hub opposite the cover
- Set-screw hubs grip EMT
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT	HALEX
677-30001	1/2 in.	1 / 10 / 25 / 100	LB-31	58705
677-30002	3/4 in.	1 / 10 / 25 / 100	LB-32	58707
677-30003	1 in.	1 / 10 / 25	LB-33	—
677-30004	1-1/4 in.	1 / 10	LB-34	—
677-30005	1-1/2 in.	1 / 10	LB-35	—
677-30006	2 in.	1	LB-36	—

WHERE IT INSTALLS

- EMT runs passing through a wall or partition
- 90° turns where the run leaves a wall surface
- Pull points at a change of direction



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-bodies

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



C Conduit Bodies, Threaded (675)

C body gives a straight-through pull point on rigid runs.

COPPER-FREE ALUMINUM

UL LISTED

CSA CERTIFIED



FEATURES


- Hubs in line, straight through
- NPT hubs for RMC and IMC
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	O-Z/GEDNEY	PACK QTY	CROUSE-HINDS	APPLETON
675-30011	1/2 in.	C17	1 / 10 / 25	C17	C17
675-30012	3/4 in.	C27	1 / 10 / 25	C27	C27
675-30013	1 in.	C37	1 / 10 / 25	C37	C37
675-30014	1-1/4 in.	C47	1 / 10	C47	C47
675-30015	1-1/2 in.	C57	1 / 10	C57	C57
675-30016	2 in.	C67	1	C67	C67

WHERE IT INSTALLS

- Pull points on long straight rigid and IMC runs
- Breaking a long pull into shorter sections
- Straight runs that need an access cover



C Conduit Bodies, Set-Screw (677)

C body gives a straight-through pull point on EMT runs.

COPPER-FREE ALUMINUM

UL LISTED



FEATURES

- Hubs in line, straight through
- Set-screw hubs grip EMT
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING UL Listed

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
677-30011	1/2 in.	1 / 10 / 25	C-31
677-30012	3/4 in.	1 / 10 / 25	C-32
677-30013	1 in.	1 / 10 / 25	C-33
677-30014	1-1/4 in.	1 / 10 / 25	C-34
677-30015	1-1/2 in.	1 / 10 / 25	C-35
677-30016	2 in.	1 / 10	C-36

WHERE IT INSTALLS

- Pull points on long straight EMT runs
- Breaking a long pull into shorter sections
- Straight runs that need an access cover



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-bodies

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



LL Conduit Bodies, Threaded (675)

COPPER-FREE ALUMINUM

NEMA 3R

UL LISTED

CSA CERTIFIED

LL turns 90° out the left side on rigid and IMC runs.



FEATURES

- Second hub exits the left side
- NPT hubs for RMC and IMC
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	O-Z/GEDNEY	PACK QTY	CROUSE-HINDS	APPLETON
675-30021	1/2 in.	LL17	1 / 10 / 25	LL17	LL17
675-30022	3/4 in.	LL27	1 / 10 / 25	LL27	LL27
675-30023	1 in.	LL37	1 / 10 / 25	LL37	LL37
675-30024	1-1/4 in.	LL47	1 / 10	LL47	LL47
675-30025	1-1/2 in.	LL57	1 / 10	LL57	LL57
675-30026	2 in.	LL67	1	LL67	LL67

WHERE IT INSTALLS

- 90° left turns along a wall or ceiling
- Corners where an LB outlet would face the wrong way
- Pull points at a change of direction on rigid runs



LL Conduit Bodies, Set-Screw (677)

NEMA 3R

UL LISTED

CSA CERTIFIED

LL turns 90° out the left side on EMT runs.



FEATURES


- Second hub exits the left side
- Set-screw hubs grip EMT
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
677-30021	1/2 in.	1 / 10 / 25	LL-31
677-30022	3/4 in.	1 / 10 / 25	LL-32
677-30023	1 in.	1 / 10	LL-33
677-30024	1-1/4 in.	1 / 10	LL-34
677-30025	1-1/2 in.	1 / 10	LL-35
677-30026	2 in.	1 / 10	LL-36

WHERE IT INSTALLS

- 90° left turns along a wall or ceiling
- Corners where an LB outlet would face the wrong way
- Pull points at a change of direction on EMT runs



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-bodies

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



LR Conduit Bodies, Threaded (675)

COPPER-FREE ALUMINUM

NEMA 3R

UL LISTED

CSA CERTIFIED

LR turns 90° out the right side on rigid and IMC runs.



FEATURES

- Second hub exits the right side
- NPT hubs for RMC and IMC
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	O-Z/GEDNEY	PACK QTY	CROUSE-HINDS	APPLETON
675-30031	1/2 in.	LR17	1 / 10 / 25	LR17	LR17
675-30032	3/4 in.	LR27	1 / 10 / 25	LR27	LR27
675-30033	1 in.	LR37	1 / 10 / 25	LR37	LR37
675-30034	1-1/4 in.	LR47	1 / 10	LR47	LR47
675-30035	1-1/2 in.	LR57	1 / 10	LR57	LR57
675-30036	2 in.	LR67	1	LR67	LR67

WHERE IT INSTALLS

- 90° right turns along a wall or ceiling
- Mirror of the LL where the run turns the other way
- Pull points at a change of direction on rigid runs



LR Conduit Bodies, Set-Screw (677)

NEMA 3R

UL LISTED

CSA CERTIFIED

LR turns 90° out the right side on EMT runs.



FEATURES


- Second hub exits the right side
- Set-screw hubs grip EMT
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed · CSA Certified

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
677-30031	1/2 in.	1 / 10 / 25	LR-31
677-30032	3/4 in.	1 / 10 / 25	LR-32
677-30033	1 in.	1 / 10 / 25	LR-33
677-30034	1-1/4 in.	1 / 10	LR-34
677-30035	1-1/2 in.	1 / 10	LR-35
677-30036	2 in.	1	LR-36

WHERE IT INSTALLS

- 90° right turns along a wall or ceiling
- Mirror of the LL where the run turns the other way
- Pull points at a change of direction on EMT runs



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/rigid-conduit-bodies

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



T Conduit Bodies, Threaded (675)

T body taps a branch off a rigid or IMC run.

COPPER-FREE ALUMINUM

NEMA 3R

UL LISTED



FEATURES


- Three hubs for a branch tap
- NPT hubs for RMC and IMC
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum LISTING NEMA 3R · UL Listed

CATALOG NO.	TRADE SIZE	O-Z/GEDNEY	PACK QTY	CROUSE-HINDS	APPLETON
675-30041	1/2 in.	T17	1	T17	T17
675-30042	3/4 in.	T27	1 / 10 / 25	T27	T27
675-30043	1 in.	T37	1 / 10 / 25	T37	T37
675-30044	1-1/4 in.	T47	1 / 10	T47	T47
675-30045	1-1/2 in.	T57	1 / 10	T57	T57
675-30046	2 in.	T67	1	T67	T67

WHERE IT INSTALLS

- Tapping a branch circuit off the main rigid run
- Splitting one run in two directions
- Pull points at a three-way junction



T Conduit Bodies, Set-Screw (677)

T body taps a branch off an EMT run.

COPPER-FREE ALUMINUM



FEATURES


- Three hubs for a branch tap
- Set-screw hubs grip EMT
- Cover and gasket included
- 1/2 to 2 in. trade sizes

MATERIAL Copper-free aluminum

CATALOG NO.	TRADE SIZE	PACK QTY	BRIDGEPORT
677-30041	1/2 in.	1 / 10 / 25	T-31
677-30042	3/4 in.	1 / 10 / 25	T-32
677-30043	1 in.	1 / 10	T-33
677-30044	1-1/4 in.	1 / 10	T-34
677-30045	1-1/2 in.	1 / 10	T-35
677-30046	2 in.	1 / 10	T-36

WHERE IT INSTALLS

- Tapping a branch circuit off the main EMT run
- Splitting one run in two directions
- Pull points at a three-way junction



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/rigid-conduit-bodies

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Straps & Supports

Section F · Securing the Run

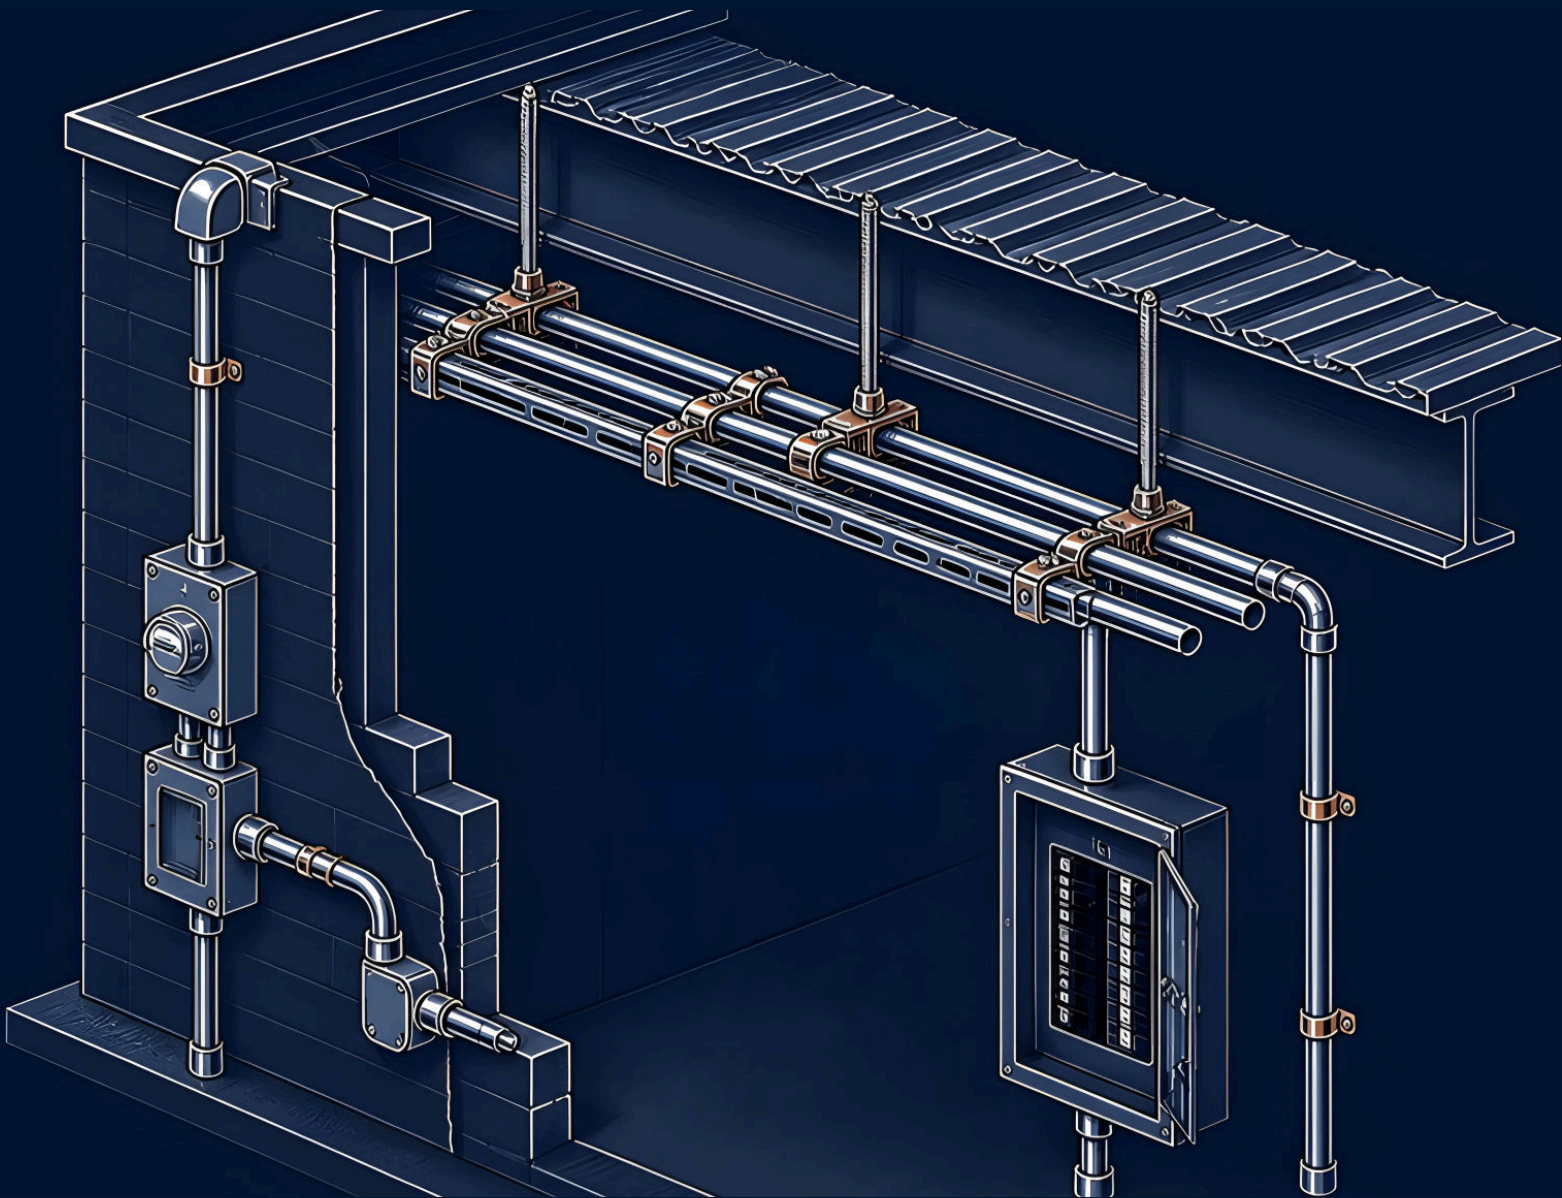

CT-30

One-hole · Two-hole · Hangers · Strut clamps · Malleable · NEC 358.30

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

EMT One-Hole Straps

ELECTRO-GALV. STEEL

NEC 358.30 SUPPORT

The default strap for EMT on walls, ceilings and framing.



FEATURES


- Electro-galvanized
- One-hole, one-screw mount
- 1/2 to 2 in. trade sizes
- Fits 0.706 to 2.197 in. OD EMT

MATERIAL Electro-galv. steel CODE NEC 358.30 support

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO
OSP-050	1/2 in.	0.706	1 / 10 / 25 / 100	2082
OSP-075	3/4 in.	0.922	1 / 10 / 25 / 100	2083
OSP-100	1 in.	1.163	1	2084
OSP-125	1-1/4 in.	1.510	1 / 10 / 25 / 100	2085
OSP-150	1-1/2 in.	1.740	1 / 10 / 25 / 100	2086
OSP-200	2 in.	2.197	1 / 10 / 25 / 100	2088

WHERE IT INSTALLS

- Supporting EMT on walls, ceilings and framing
- Within 3 ft of every box and every 10 ft
- Exposed commercial runs



Rigid One-Hole Straps

ELECTRO-GALV. STEEL

NEC 344.30 SUPPORT

NEC 342.30 SUPPORT

One-screw support sized to rigid and IMC OD.



FEATURES


- Electro-galvanized
- One-hole, one-screw mount
- 1/2 to 2 in. trade sizes
- Fits 0.840 to 2.375 in. OD RMC

MATERIAL Electro-galv. steel CODE NEC 344.30 support · NEC 342.30 support

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO
OSP-050R	1/2 in.	0.840	1 / 10 / 25 / 100	1332
OSP-075R	3/4 in.	1.050	1 / 10 / 25 / 100	1333
OSP-100R	1 in.	1.315	1 / 10 / 25 / 100	1334
OSP-125R	1-1/4 in.	1.660	1 / 10 / 25 / 100	1335
OSP-150R	1-1/2 in.	1.900	1 / 10 / 25 / 100	1336
OSP-200R	2 in.	2.375	1 / 10 / 25 / 100	1338

WHERE IT INSTALLS

- Supporting rigid and IMC on walls, ceilings and framing
- Exterior galvanized runs; stainless in corrosive areas
- Within 3 ft of every box, then 10 to 20 ft by size



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-straps-and-hangers

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Rigid Two-Hole Straps

Two-screw support that resists rotation on large rigid.



FEATURES

- Electro-galvanized
- Two-hole, two-anchor mount
- 1-1/4, 2 and 2-1/2 in. sizes
- Fits 1.660 to 2.875 in. OD RMC

ELECTRO-GALV. STEEL

NEC 344.30 SUPPORT


NEC 342.30 SUPPORT

MATERIAL Electro-galv. steel CODE NEC 344.30 support · NEC 342.30 support

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO	BRIDGEPORT
TSP-125R	1-1/4 in.	1.660	1 / 10 / 25 / 100	2235	1904
TSP-200R	2 in.	2.375	1 / 10 / 25 / 100	2238	1906
TSP-250R	2-1/2 in.	2.875	1 / 10 / 25 / 100	2239	1907

WHERE IT INSTALLS

- Heavy and vertical rigid runs that must resist rotation
- Masonry and concrete with two anchors
- Specs calling for two-hole straps on 1-1/2 in. and up



Conduit Hangers, Bolt & Nut

Hangs EMT or rigid from all-thread rod.



FEATURES

- Electro-galvanized
- Carriage bolt and nut closure
- Hangs on 1/4-20 or 3/8 in. rod
- 1/2 to 2 in. trade sizes

ELECTRO-GALV. STEEL

NEC 358.30 SUPPORT


NEC 344.30 SUPPORT

MATERIAL Electro-galv. steel CODE NEC 358.30 support · NEC 344.30 support

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO
CH-050	1/2 in.	0.706	1 / 10 / 25 / 100	2052
CH-075	3/4 in.	0.922	1 / 10 / 25 / 100	2053
CH-100	1 in.	1.163	1	2054
CH-125	1-1/4 in.	1.510	1 / 10 / 25 / 100	2055
CH-150	1-1/2 in.	1.740	1 / 10 / 25 / 100	2056
CH-200	2 in.	2.197	1 / 10 / 25 / 100	2058

WHERE IT INSTALLS

- Runs suspended on all-thread from the deck
- Trapezes and strut racks
- Mechanical rooms and parking structures



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/emt-straps-and-hangers

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Strut Clamps, EMT & Rigid

ELECTRO-GALV. STEEL

Locks EMT and rigid to 1-5/8 in. strut channel.



FEATURES


- Electro-galvanized
- Bolt and nut included
- Fits 1-5/8 in. strut channel
- 1/2 to 3 in. trade sizes

MATERIAL Electro-galv. steel

CATALOG NO.	TRADE SIZE	PACK QTY	SUPERSTRUT
SC-050	1/2 in.	1	703-1/2-EG
SC-075	3/4 in.	1	703-3/4-EG
SC-100	1 in.	1	703-1-EG
SC-125	1-1/4 in.	1	703-1-1/4-EG
SC-150	1-1/2 in.	1	703-1-1/2-EG
SC-200	2 in.	1	703-2-EG
SC-250	2-1/2 in.	1	702-2-1/2-EG
SC-300	3 in.	1	702-3-EG

WHERE IT INSTALLS

- Locking conduit to strut trapezes and wall channel
- Racked parallel runs in mechanical and electrical rooms
- Rooftop and plant runs on strut supports



Malleable Straps, Clamp Backs & Midget Straps

MALLEABLE IRON / STEEL

Heavy-duty and specialty supports for rigid runs.



FEATURES


- Malleable iron strap, clamp back
- Zinc-plated finish
- 3/4 in. for rigid and EMT
- 1/4 in. one-hole midget strap

MATERIAL Malleable iron, steel

CATALOG NO.	TRADE SIZE	FITS OD (IN.)	PACK QTY	RACO
MHS-104	1/4 in.	—	1 / 10 / 25 / 100	—
MCB-075	3/4 in.	—	1	—
MST-075	3/4 in.	1.050	1 / 10 / 25 / 100	2043

WHERE IT INSTALLS

- Heavy rigid runs where a stamped strap would deform
- Exterior and wash-down rigid runs
- Ground conductors and small cable on a surface



F

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES


conversiontech.com/collections/emt-straps-and-hangers

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



Boxes, Covers & Glands

Section G · Weatherproof Boxes & Cable Entry

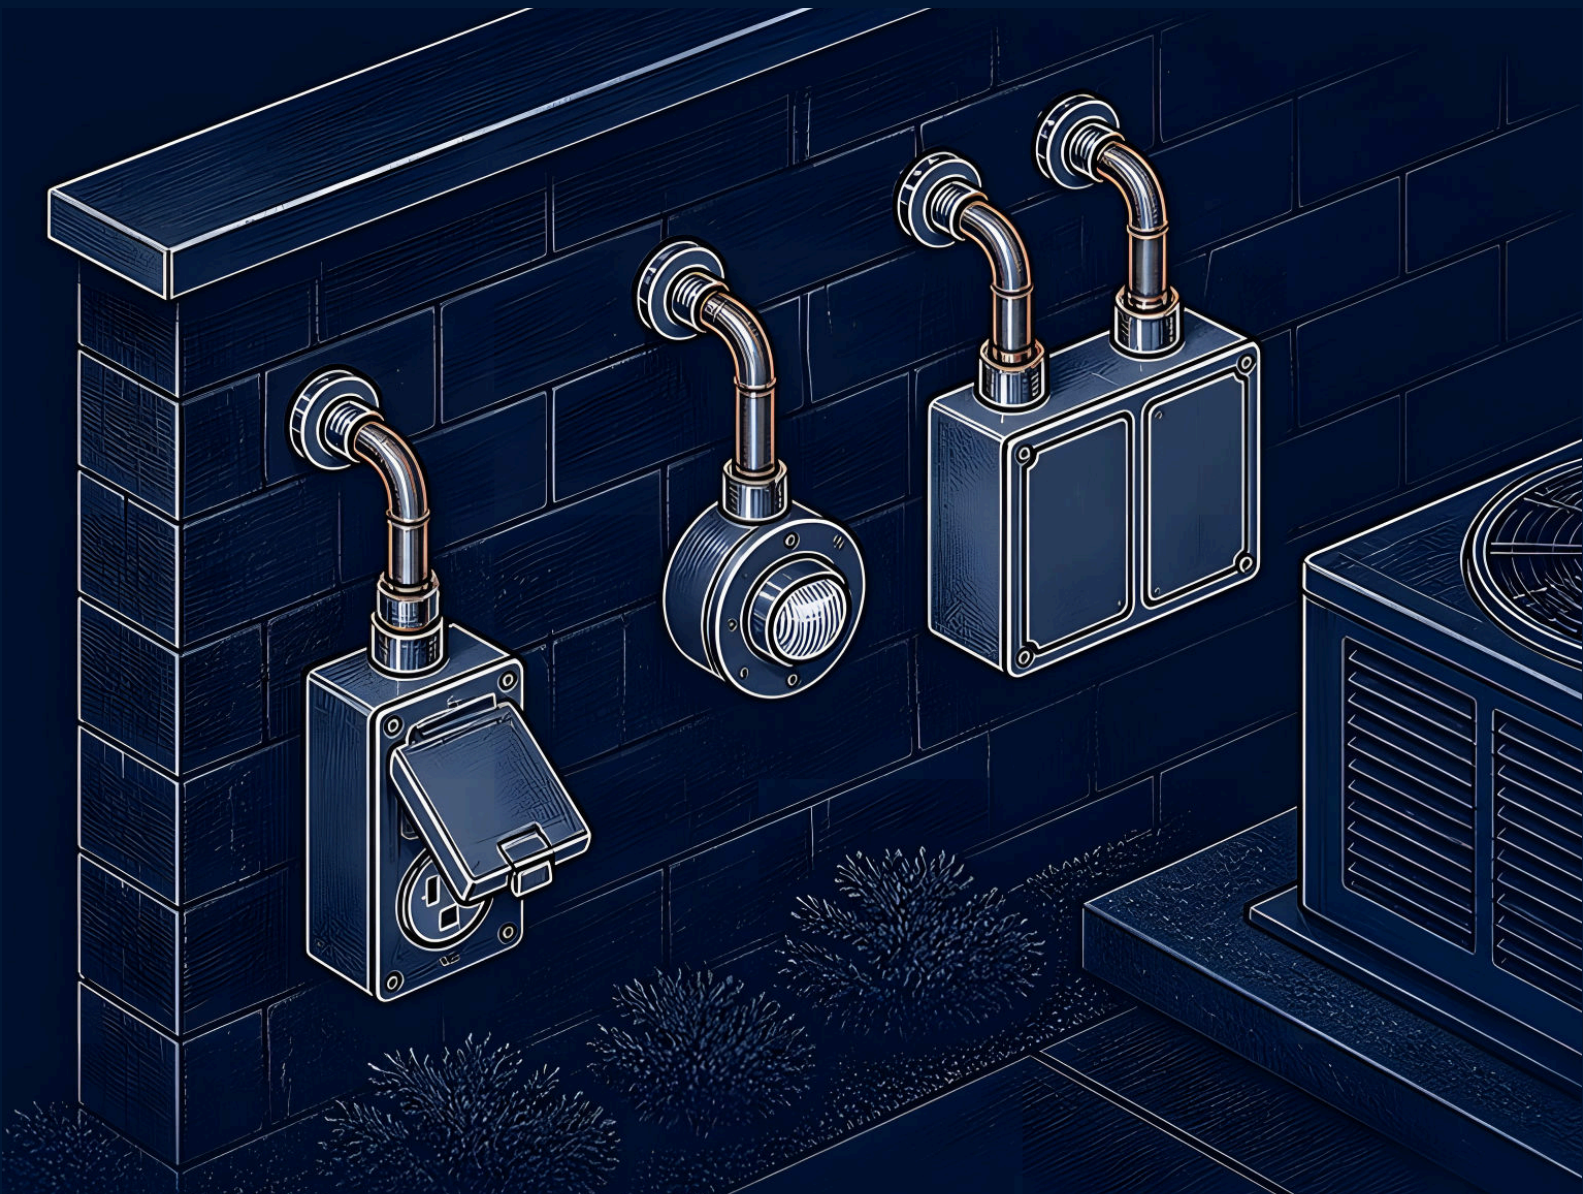

CT-30 Die-cast boxes · In-use covers · Nylon NPT cable glands

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY

Weatherproof Boxes, Die-Cast Aluminum

DIE-CAST ALUMINUM

Die-cast 1-gang boxes for outdoor and wet-area devices.



FEATURES

- Die-cast aluminum body
- Gray powder-coat finish
- 1/2, 3/4 and 1 in. hubs
- Integral mounting lugs

MATERIAL Die-cast aluminum

CATALOG NO.	TYPE	HUBS	PACK QTY	BELL
210-31001	1-Gang	1/2 in.	1 / 10 / 25	5320-0
210-31004HV	1-Gang	5 × 1/2 in.	1 / 10 / 25	—
210-31008	1-Gang	4 × 1/2 in.	1 / 10 / 25	5321-0
210-31011	1-Gang	3/4 in.	1 / 10 / 25	5324-0
210-31015	1-Gang	3/4 in.	1 / 10 / 25	5386-0
210-31021	1-Gang	3 × 1/2 in.	1 / 10 / 25	5385-0
210-31023	1-Gang	3 × 1 in.	1 / 10 / 25	—

WHERE IT INSTALLS

- Exterior switches, GFCI outlets and receptacles
- Outdoor lighting fixtures
- HVAC disconnects and industrial controls



Weatherproof Boxes and Covers (cont.)

DIE-CAST METAL

More boxes: 1-gang 5-hub, 2-gang, 4 in. round, plus a lockable in-use cover.



FEATURES

- Die-cast metal boxes
- 2-gang and 4 in. round styles
- 1/2 and 3/4 in. threaded hubs
- Lockable 1-gang in-use cover

MATERIAL Die-cast metal

CATALOG NO.	TYPE	HUBS	PACK QTY	BELL
210-31061	1-Gang	5 × 1/2 in.	1 / 10 / 25	5322-0
210-31049	2-Gang	7 × 3/4 in.	1 / 10	—
210-31114	2-Gang	7 × 3/4 in.	1 / 10 / 25	5346-0
211-35012	Round	5 × 1/2 in.	1 / 10 / 25	5361-0
211-35034	Round	5 × 3/4 in.	1 / 10 / 25	5372-0
880-61001	In-use cover	—	1	—

WHERE IT INSTALLS

- Outdoor receptacles, switches and junction points
- Exterior lighting and branch circuit connections
- Wet-location receptacles that need a lockable cover



SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/weatherproof-electrical-outlet-box

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



NPT Cable Glands, Nylon

NYLON (PA-6)

IP68

NEMA 6P

Seals and strain-relieves cable at the enclosure wall.



FEATURES

- UV-stable PA-6 nylon body
- Ships with locknut and washer
- 1/2 to 2 in. NPT threads
- Takes 0.16 to 1.50 in. OD cable

MATERIAL Nylon (PA-6) LISTING IP68 · NEMA 6P

CATALOG NO.	TRADE SIZE	CABLE OD (IN.)	PACK QTY	HEYCO	BODY
9889-0012	1/2 in.	0.16–0.40	1	3231	Standard
9889-0012G	1/2 in.	0.16–0.40	1	—	Standard
9889-0012S	1/2 in.	0.24–0.47	1	—	Slim
9889-0034	3/4 in.	0.28–0.55	1	—	Standard
9889-0034S	3/4 in.	0.35–0.63	1	—	Slim
9889-0100	1 in.	0.43–0.71	1	—	Standard
9889-0114	1-1/4 in.	0.55–0.87	1	—	Standard
9889-0112B	1-1/2 in.	0.75–1.10	1	—	Standard
9889-0200	2 in.	1.00–1.50	1	—	Standard


WHERE IT INSTALLS

- PV combiner boxes and inverter drops
- PLC enclosures, VFD drives and pump skids
- EV charge posts and outdoor cameras



Built for the outside wall

Die-cast weatherproof boxes, in-use covers and nylon glands for wet and outdoor locations.

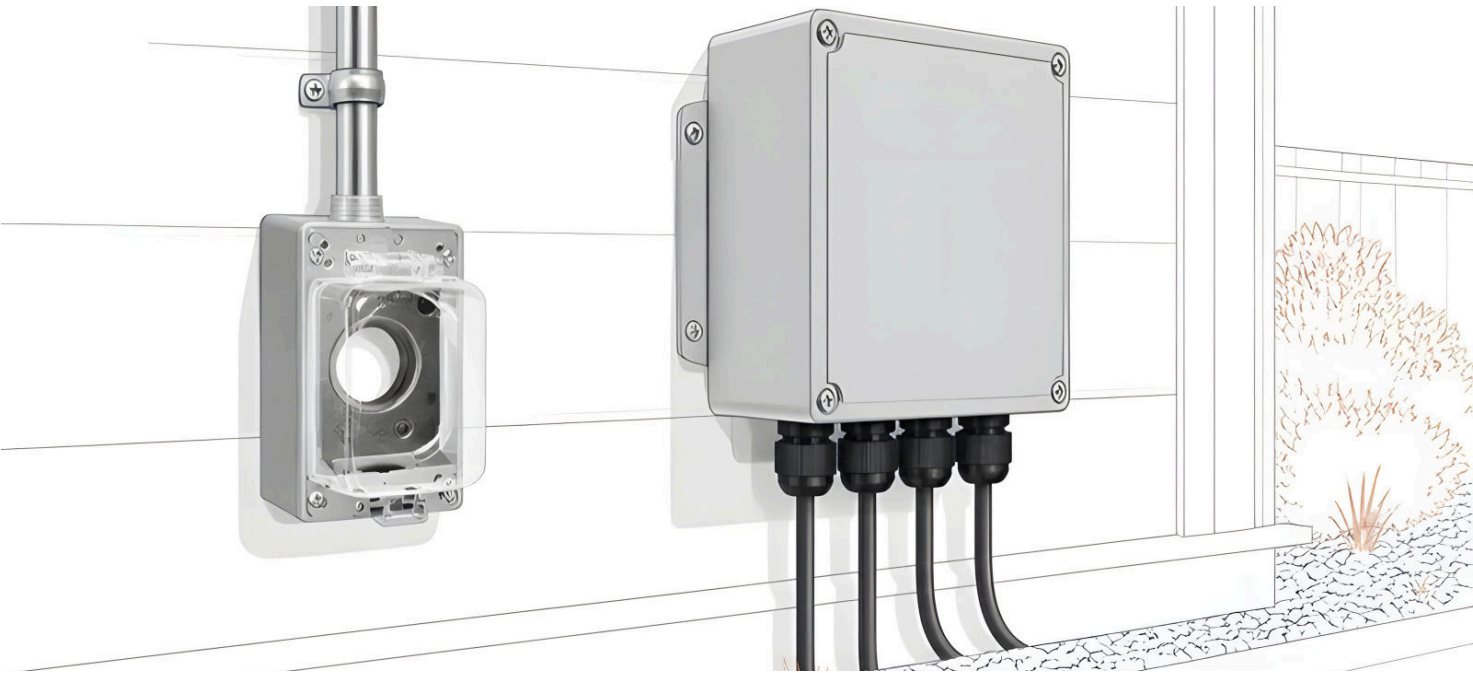

SCAN FOR LIVE STOCK, FULL SPECS AND CROSSES

conversiontech.com/collections/weatherproof-electrical-outlet-box

The catalog number is the store SKU. Same-day shipping on in-stock items. Trade accounts and quotes: (307) 206-0534.



COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE
Crouse-Hinds	Appleton, O-Z		Bridgeport			Bridgeport		
C17	675-30011	E-3	106-S	3111-0002	D-2	265	3105-0002	B-2
C27	675-30012	E-3	107-S	LN-250	D-2	281-DC	3117-0012	A-5
C37	675-30013	E-3	108-S	LN-300	D-2	282-DC	3117-0034	A-5
C47	675-30014	E-3	151-DC	3128-0012	C-4	282-DC	ESC-075	B-3
C57	675-30015	E-3	152-DC	3128-0034	C-4	283-DC	ESC-100	B-3
C67	675-30016	E-3	153-DC	3128-0001	C-4	291-CDC	ERC-075	C-3
LB17	675-30001	E-2	154-DC	3128-0114	C-4	292-CDC	ERC-100	C-3
LB27	675-30002	E-2	155-DC	3128-0112	C-4	295-CDC	ERC-200	C-3
LB37	675-30003	E-2	156-DC	3128-0002	C-4	321	CPB-050	D-4
LB47	675-30004	E-2	230-DC2	3125-0012	A-2	322	CPB-075	D-4
LB57	675-30005	E-2	231-DC2	3125-0034	A-2	323	CPB-100	D-4
LB67	675-30006	E-2	232-DC2	3125-0001	A-2	324	CPB-125	D-4
LL17	675-30021	E-4	233-DC2	3125-0114	A-2	325	CPB-150	D-4
LL27	675-30022	E-4	234-DC2	3125-0112	A-2	326	CPB-200	D-4
LL37	675-30023	E-4	235-DC2	3125-0002	A-2	327	CPB-250	D-4
LL47	675-30024	E-4	240-DC	3109-0012	B-2	381-DC	3114-0012	D-3
LL57	675-30025	E-4	241-DC	3109-0034	B-2	382-DC	3114-0034	D-3
LL67	675-30026	E-4	242-DC	3109-0001	B-2	383-DC	3114-0001	D-3
LR17	675-30031	E-5	243-DC	3109-0114	B-2	384-DC	3114-0114	D-3
LR27	675-30032	E-5	244-DC	3109-0112	B-2	385-DC	3114-0112	D-3
LR37	675-30033	E-5	245-DC	3109-0002	B-2	386-DC	3114-0002	D-3
LR47	675-30034	E-5	250	3101-0012	A-2	407-DC2	3119-0012	A-3
LR57	675-30035	E-5	250-SRTI	3104-0012	A-3	408-DC2	3119-0034	A-3
LR67	675-30036	E-5	251	3101-0034	A-2	416-DC2	3119-0002	A-3
T17	675-30041	E-6	251-SRTI	3104-0034	A-3	430-NMLT	SLT-050N	A-7
T27	675-30042	E-6	252	3101-0001	A-2	431-NMLT	SLT-075N	A-7
T37	675-30043	E-6	252-SRTI	3104-0001	A-3	432-NMLT	SLT-100N	A-7
T47	675-30044	E-6	253	3101-0114	A-2	433-SLTI	SLT-125I	A-7
T57	675-30045	E-6	253-SRTI	3104-0114	A-3	470-NMLT	ALT-050N	A-7
T67	675-30046	E-6	254	3101-0112	A-2	471-LTI2	ALT-075I	A-7
Bridgeport			254-SRTI	3104-0112	A-3	471-NMLT	ALT-075N	A-7
83-DC	RTR-100	C-6	255-S	3101-0002	A-2	472-NMLT	ALT-100N	A-7
101-S	3111-0012	D-2	255-SRTI	3104-0002	A-3	521-DC2	XC-075	A-5
102-S	3111-0034	D-2	260	3105-0012	B-2	522-DC2	XC-100	A-5
103-S	3111-0001	D-2	261	3105-0034	B-2	531-DC	XK-075	A-5
104-S	3111-0114	D-2	262	3105-0001	B-2	532-DC	XK-100	A-5
105-S	3111-0112	D-2	263	3105-0114	B-2	565-DC2	SCCC-038	A-6
			264	3105-0112	B-2	620-NM	PICC-050	A-6

COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE
Bridgeport			Bridgeport			Bridgeport		
670-DC2	RTCC-075	A-6	1696	KOS-200	D-4	LR-35	677-30035	E-5
672-DC2	RTCC-100	A-6	1904	TSP-125R	F-3	LR-36	677-30036	E-5
674-DC2	RTCC-125	A-6	1906	TSP-200R	F-3	NIP-050CL	8381H	C-4
675-DC2	RTCC-150	A-6	1907	TSP-250R	F-3	NIP-100CL	8382H	C-4
676-DC2	RTCC-200	A-6	3000	RT-50	C-3	NIP-125CL	8383H	C-4
806-DC2	ASC-075	A-4	3001	RT-75	C-3	NIP-200CL	8385H	C-4
807-DC2	ASC-100	A-4	3002	RT-100	C-3	NIP-075150	8381112H	C-4
808-DC2	ASC-125	A-4	3003	RT-125	C-3	NIP-075250	8381212H	C-4
1063	RW-100075	D-5	3004	RT-150	C-3	NIP-075300	83813H	C-4
1065	RW-125075	D-5	3005	RT-200	C-3	NIP-075400	83814H	C-4
1066	RW-125100	D-5	3100	RTC-50	C-2	NIP-075500	83815H	C-4
1072	RW-200075	D-5	3101	RTC-75	C-2	NIP-075600	83816H	C-4
1074	RW-200125	D-5	3102	RTC-100	C-2	NIP-100300	83823H	C-4
1121-SC	0324	C-2	3103	RTC-125	C-2	NIP-100400	83824H	C-4
1122-SC	0325	C-2	3104	RTC-150	C-2	NIP-100600	83826H	C-4
1123-SC	0326	C-2	3105	RTC-200	C-2	NIP-200300	83853H	C-4
1124-SC	0327	C-2	C-31	677-30011	E-3	T-31	677-30041	E-6
1125-SC	0328	C-2	C-32	677-30012	E-3	T-32	677-30042	E-6
1126-SC	0329	C-2	C-33	677-30013	E-3	T-33	677-30043	E-6
1128-SC	0331	C-2	C-34	677-30014	E-3	T-34	677-30044	E-6
1163	RB-100075	C-5	C-35	677-30015	E-3	T-35	677-30045	E-6
1166	RB-125100	C-5	C-36	677-30016	E-3	T-36	677-30046	E-6
1174	RB-200125	C-5	LB-31	677-30001	E-2	RACO		
1254	EC2-125	C-6	LB-32	677-30002	E-2	1002	3111-0012	D-2
1256	EC2-200	C-6	LB-33	677-30003	E-2	1003	3111-0034	D-2
1257	EC2-250	C-6	LB-34	677-30004	E-2	1004	3111-0001	D-2
1521-DC	OFN-075	C-5	LB-35	677-30005	E-2	1005	3111-0114	D-2
1522-DC	OFN-100	C-5	LB-36	677-30006	E-2	1006	3111-0112	D-2
1523-DC	OFN-125	C-5	LL-31	677-30021	E-4	1008	3111-0002	D-2
1524-DC	OFN-150	C-5	LL-32	677-30022	E-4	1010	LN-250	D-2
1525-DC	OFN-200	C-5	LL-33	677-30023	E-4	1012	LN-300	D-2
1620-DC2	MHZ-50	A-4	LL-34	677-30024	E-4	1042	KOS-050	D-4
1621-DC2	MHZ-75	A-4	LL-35	677-30025	E-4	1043	KOS-075	D-4
1622-DC2	MHZ-100	A-4	LL-36	677-30026	E-4	1044	KOS-100	D-4
1691	KOS-050	D-4	LR-31	677-30031	E-5	1045	KOS-125	D-4
1692	KOS-075	D-4	LR-32	677-30032	E-5	1048	KOS-200	D-4
1693	KOS-100	D-4	LR-33	677-30033	E-5	1102	3113-0012	D-3
1694	KOS-125	D-4	LR-34	677-30034	E-5	1103	3113-0034	D-3

COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE
RACO			RACO			RACO		
1104	3113-0001	D-3	1708	3128-0002	C-4	2283	XC-075	A-5
1105	3113-0114	D-3	1762	MHZ-50	A-4	2284	XC-100	A-5
1106	3113-0112	D-3	1763	MHZ-75	A-4	2602	3125-0012	A-2
1108	3113-0002	D-3	1802	RT-50	C-3	2603	3125-0034	A-2
1122	0324	C-2	1803	RT-75	C-3	2604	3125-0001	A-2
1123	0325	C-2	1804	RT-100	C-3	2605	3125-0114	A-2
1124	0326	C-2	1805	RT-125	C-3	2606	3125-0112	A-2
1125	0327	C-2	1806	RT-150	C-3	2608	3125-0002	A-2
1126	0328	C-2	1808	RT-200	C-3	2622	3109-0012	B-2
1128	0329	C-2	1822	RTC-50	C-2	2623	3109-0034	B-2
1144	RB-100075	C-5	1823	RTC-75	C-2	2624	3109-0001	B-2
1147	RB-125100	C-5	1824	RTC-100	C-2	2625	3109-0114	B-2
1155	RB-200125	C-5	1825	RTC-125	C-2	2626	3109-0112	B-2
1332	OSP-050R	F-2	1826	RTC-150	C-2	2628	3109-0002	B-2
1333	OSP-075R	F-2	1828	RTC-200	C-2	2661	SCCC-038	A-6
1334	OSP-100R	F-2	2043	MST-075	F-4	2693	ASC-075	A-4
1335	OSP-125R	F-2	2052	CH-050	F-3	2694	ASC-100	A-4
1336	OSP-150R	F-2	2053	CH-075	F-3	2695	ASC-125	A-4
1338	OSP-200R	F-2	2054	CH-100	F-3	2711	RTCC-050	A-6
1353	ERC-075	C-3	2055	CH-125	F-3	2863	RTCC-075	A-6
1354	ERC-100	C-3	2056	CH-150	F-3	2864	RTCC-100	A-6
1367	RW-100075	D-5	2058	CH-200	F-3	2902	3101-0012	A-2
1369	RW-125075	D-5	2082	OSP-050	F-2	2903	3101-0034	A-2
1370	RW-125100	D-5	2083	OSP-075	F-2	2904	3101-0001	A-2
1376	RW-200075	D-5	2084	OSP-100	F-2	2905	3101-0114	A-2
1378	RW-200125	D-5	2085	OSP-125	F-2	2906	3101-0112	A-2
1402	CPB-050	D-4	2086	OSP-150	F-2	2908	3101-0002	A-2
1403	CPB-075	D-4	2088	OSP-200	F-2	2912RT	3104-0012	A-3
1404	CPB-100	D-4	2102	3119-0012	A-3	2913RT	3104-0034	A-3
1405	CPB-125	D-4	2103	3119-0034	A-3	2914RT	3104-0001	A-3
1406	CPB-150	D-4	2104	3119-0001	A-3	2915RT	3104-0114	A-3
1408	CPB-200	D-4	2105	3119-0114	A-3	2916RT	3104-0112	A-3
1410	CPB-250	D-4	2106	3119-0112	A-3	2918RT	3104-0002	A-3
1702	3128-0012	C-4	2108	3119-0002	A-3	2922	3105-0012	B-2
1703	3128-0034	C-4	2235	TSP-125R	F-3	2923	3105-0034	B-2
1704	3128-0001	C-4	2238	TSP-200R	F-3	2924	3105-0001	B-2
1705	3128-0114	C-4	2239	TSP-250R	F-3	2925	3105-0114	B-2
1706	3128-0112	C-4	2273	XK-075	A-5	2926	3105-0112	B-2


COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE	COMPETITOR NO.	CT CATALOG NO.	PAGE
RACO			Arlington			Halex		
2928	3105-0002	B-2	GFC75	XK-075	A-5	58707	677-30002	E-2
3515RAC	SLT-125I	A-7	GFC100	XK-100	A-5	60710B	KOS-100	D-4
3543	ALT-075I	A-7	LT125A	SLT-125I	A-7	60795B	KOS-050	D-4
4722	SLT-050N	A-7	LT9075A	ALT-075I	A-7	60797B	KOS-075	D-4
4723	SLT-075N	A-7	NM94	PICC-050, HLC-050	A-6	76205B	SLT-050N	A-7
4724	SLT-100N	A-7	NM95	PICC-075	A-6	76207B	SLT-075N	A-7
4732	ALT-050N	A-7	NMLT50	SLT-050N	A-7	76210B	SLT-100N	A-7
4733	ALT-075N	A-7	NMLT75	SLT-075N	A-7	76905B	ALT-050N	A-7
4734	ALT-100N	A-7	NMLT100	SLT-100N	A-7	76907B	ALT-075N	A-7
Appleton			NMLT9050	ALT-050N	A-7	76910B	ALT-100N	A-7
GIB-50L-4AC	3114-0012	D-3	NMLT9075	ALT-075N	A-7	86212B	SLT-125I	A-7
GIB-75L-4AC	3114-0034	D-3	NMLT90100	ALT-100N	A-7	86907B	ALT-075I	A-7
GIB-100L-4AC	3114-0001	D-3	Bell			90513	RTCC-100	A-6
GIB-125L-4AC	3114-0114	D-3	5320-0	210-31001	G-2	90514	RTCC-125	A-6
GIB-150L-4AC	3114-0112	D-3	5321-0	210-31008	G-2	91531	3117-0012	A-5
GIB-200L-4AC	3114-0002	D-3	5322-0	210-31061	G-2	94107	RTR-075	C-6
O-Z/Gedney			5324-0	210-31011	G-2	Superstrut		
IBC-75L-4AC	3114-0034	D-3	5346-0	210-31114	G-2	702-2-1/2-EG	SC-250	F-4
IBC-100L-4AC	3114-0001	D-3	5361-0	211-35012	G-2	702-3-EG	SC-300	F-4
IBC-125L-4AC	3114-0114	D-3	5372-0	211-35034	G-2	703-1-1/2-EG	SC-150	F-4
IBC-150L-4AC	3114-0112	D-3	5385-0	210-31021	G-2	703-1-1/4-EG	SC-125	F-4
IBC-200L-4AC	3114-0002	D-3	5386-0	210-31015	G-2	703-1-EG	SC-100	F-4
Arlington			Carlton			703-1/2-EG	SC-050	F-4
450	3114-0012	D-3	LT20D-NEW	ALT-050N	A-7	703-2-EG	SC-200	F-4
451	3114-0034	D-3	LT20E-NEW	ALT-075N	A-7	703-3/4-EG	SC-075	F-4
452	3114-0001	D-3	LT20F-NEW	ALT-100N	A-7	T&B		
453	3114-0114	D-3	LT43D-NEW	SLT-050N	A-7	6323	ALT-075N	A-7
454	3114-0112	D-3	LT43E-NEW	SLT-075N	A-7	LT502	SLT-075N	A-7
455	3114-0002	D-3	LT43F-NEW	SLT-100N	A-7	LT503	SLT-100N	A-7
861	3117-0012	A-5	Halex			LT-591	ALT-050N	A-7
862	3117-0034	A-5	04407B	XC-075	A-5	LT-593	ALT-100N	A-7
862	ESC-075	B-3	04410B	XC-100	A-5	LT-892	ALT-075I	A-7
900	KOS-050	D-4	05115	RTCC-150	A-6	XC-242	XC-075	A-5
901	KOS-075	D-4	05120	RTCC-200	A-6	XC-243	XC-100	A-5
902	KOS-100	D-4	20512	RTCC-075	A-6	XK-242	XK-075	A-5
8400	SCCC-038	A-6	27511	PICC-050, HLC-050	A-6	XK-243	XK-100	A-5
GF75	XC-075	A-5	27512	PICC-075	A-6	Heyco		
GF100	XC-100	A-5	58705	677-30001	E-2	3231	9889-0012	G-3

CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE
0324	1/2 in.	C-2	3105-0114	1-1/4 in.	B-2	3125-0034	3/4 in.	A-2	675-30044	1-1/4 in.	E-6
0325	3/4 in.	C-2	3109-0001	1 in.	B-2	3125-0112	1-1/2 in.	A-2	675-30045	1-1/2 in.	E-6
0326	1 in.	C-2	3109-0002	2 in.	B-2	3125-0114	1-1/4 in.	A-2	675-30046	2 in.	E-6
0327	1-1/4 in.	C-2	3109-0012	1/2 in.	B-2	3128-0001	1 in.	C-4	677-30001	1/2 in.	E-2
0328	1-1/2 in.	C-2	3109-0034	3/4 in.	B-2	3128-0002	2 in.	C-4	677-30002	3/4 in.	E-2
0329	2 in.	C-2	3109-0112	1-1/2 in.	B-2	3128-0012	1/2 in.	C-4	677-30003	1 in.	E-2
0331	3 in.	C-2	3109-0114	1-1/4 in.	B-2	3128-0034	3/4 in.	C-4	677-30004	1-1/4 in.	E-2
210-31001	1/2 in.	G-2	3111-0001	1 in.	D-2	3128-0112	1-1/2 in.	C-4	677-30005	1-1/2 in.	E-2
210-31004HV	1/2 in.	G-2	3111-0002	2 in.	D-2	3128-0114	1-1/4 in.	C-4	677-30006	2 in.	E-2
210-31008	1/2 in.	G-2	3111-0012	1/2 in.	D-2	675-30001	1/2 in.	E-2	677-30011	1/2 in.	E-3
210-31011	3/4 in.	G-2	3111-0034	3/4 in.	D-2	675-30002	3/4 in.	E-2	677-30012	3/4 in.	E-3
210-31015	3/4 in.	G-2	3111-0112	1-1/2 in.	D-2	675-30003	1 in.	E-2	677-30013	1 in.	E-3
210-31021	1/2 in.	G-2	3111-0114	1-1/4 in.	D-2	675-30004	1-1/4 in.	E-2	677-30014	1-1/4 in.	E-3
210-31023	1 in.	G-2	3113-0001	1 in.	D-3	675-30005	1-1/2 in.	E-2	677-30015	1-1/2 in.	E-3
210-31049	3/4 in.	G-2	3113-0002	2 in.	D-3	675-30006	2 in.	E-2	677-30016	2 in.	E-3
210-31061	1/2 in.	G-2	3113-0012	1/2 in.	D-3	675-30011	1/2 in.	E-3	677-30021	1/2 in.	E-4
210-31114	3/4 in.	G-2	3113-0034	3/4 in.	D-3	675-30012	3/4 in.	E-3	677-30022	3/4 in.	E-4
211-35012	4 in.	G-2	3113-0112	1-1/2 in.	D-3	675-30013	1 in.	E-3	677-30023	1 in.	E-4
211-35034	4 in.	G-2	3113-0114	1-1/4 in.	D-3	675-30014	1-1/4 in.	E-3	677-30024	1-1/4 in.	E-4
3101-0001	1 in.	A-2	3114-0001	1 in.	D-3	675-30015	1-1/2 in.	E-3	677-30025	1-1/2 in.	E-4
3101-0002	2 in.	A-2	3114-0002	2 in.	D-3	675-30016	2 in.	E-3	677-30026	2 in.	E-4
3101-0012	1/2 in.	A-2	3114-0012	1/2 in.	D-3	675-30021	1/2 in.	E-4	677-30031	1/2 in.	E-5
3101-0034	3/4 in.	A-2	3114-0034	3/4 in.	D-3	675-30022	3/4 in.	E-4	677-30032	3/4 in.	E-5
3101-0112	1-1/2 in.	A-2	3114-0112	1-1/2 in.	D-3	675-30023	1 in.	E-4	677-30033	1 in.	E-5
3101-0114	1-1/4 in.	A-2	3114-0114	1-1/4 in.	D-3	675-30024	1-1/4 in.	E-4	677-30034	1-1/4 in.	E-5
3104-0001	1 in.	A-3	3117-0012	1/2 in.	A-5	675-30025	1-1/2 in.	E-4	677-30035	1-1/2 in.	E-5
3104-0002	2 in.	A-3	3117-0034	3/4 in.	A-5	675-30026	2 in.	E-4	677-30036	2 in.	E-5
3104-0012	1/2 in.	A-3	3119-0001	1 in.	A-3	675-30031	1/2 in.	E-5	677-30041	1/2 in.	E-6
3104-0034	3/4 in.	A-3	3119-0002	2 in.	A-3	675-30032	3/4 in.	E-5	677-30042	3/4 in.	E-6
3104-0112	1-1/2 in.	A-3	3119-0012	1/2 in.	A-3	675-30033	1 in.	E-5	677-30043	1 in.	E-6
3104-0114	1-1/4 in.	A-3	3119-0034	3/4 in.	A-3	675-30034	1-1/4 in.	E-5	677-30044	1-1/4 in.	E-6
3105-0001	1 in.	B-2	3119-0112	1-1/2 in.	A-3	675-30035	1-1/2 in.	E-5	677-30045	1-1/2 in.	E-6
3105-0002	2 in.	B-2	3119-0114	1-1/4 in.	A-3	675-30036	2 in.	E-5	677-30046	2 in.	E-6
3105-0012	1/2 in.	B-2	3125-0001	1 in.	A-2	675-30041	1/2 in.	E-6	8381H	1/2 in.	C-4
3105-0034	3/4 in.	B-2	3125-0002	2 in.	A-2	675-30042	3/4 in.	E-6	8382H	1 in.	C-4
3105-0112	1-1/2 in.	B-2	3125-0012	1/2 in.	A-2	675-30043	1 in.	E-6	8383H	1-1/4 in.	C-4

CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE	CATALOG NO.	SIZE	PAGE
8384H	1-1/2 in.	C-4	CH-125	1-1/4 in.	F-3	MHZ-75	3/4 in.	A-4	RTC-200	2 in.	C-2
8385H	2 in.	C-4	CH-150	1-1/2 in.	F-3	MHZ-100	1 in.	A-4	RTCC-050	1/2 in.	A-6
83813H	3/4 in.	C-4	CH-200	2 in.	F-3	MST-075	3/4 in.	F-4	RTCC-075	3/4 in.	A-6
83814H	3/4 in.	C-4	CPB-050	1/2 in.	D-4	OFN-075	3/4 in.	C-5	RTCC-100	1 in.	A-6
83815H	3/4 in.	C-4	CPB-075	3/4 in.	D-4	OFN-100	1 in.	C-5	RTCC-125	1-1/4 in.	A-6
83816H	3/4 in.	C-4	CPB-100	1 in.	D-4	OFN-125	1-1/4 in.	C-5	RTCC-150	1-1/2 in.	A-6
83822H	1 in.	C-4	CPB-125	1-1/4 in.	D-4	OFN-150	1-1/2 in.	C-5	RTCC-200	2 in.	A-6
83823H	1 in.	C-4	CPB-150	1-1/2 in.	D-4	OFN-200	2 in.	C-5	RTR-075	3/4 in.	C-6
83824H	1 in.	C-4	CPB-200	2 in.	D-4	OSP-050	1/2 in.	F-2	RTR-100	1 in.	C-6
83825H	1 in.	C-4	CPB-250	2-1/2 in.	D-4	OSP-050R	1/2 in.	F-2	RW-100075	1 × 3/4 in.	D-5
83826H	1 in.	C-4	EC2-125	1-1/4 in.	C-6	OSP-075	3/4 in.	F-2	RW-125075	1-1/4 × 3/4 in.	D-5
83832H	1-1/4 in.	C-4	EC2-200	2 in.	C-6	OSP-075R	3/4 in.	F-2	RW-125100	1-1/4 × 1 in.	D-5
83833H	1-1/4 in.	C-4	EC2-250	2-1/2 in.	C-6	OSP-100	1 in.	F-2	RW-200075	2 × 3/4 in.	D-5
83853H	2 in.	C-4	ERC-075	3/4 in.	C-3	OSP-100R	1 in.	F-2	RW-200125	2 × 1-1/4 in.	D-5
8381112H	3/4 in.	C-4	ERC-100	1 in.	C-3	OSP-125	1-1/4 in.	F-2	SC-050	1/2 in.	F-4
8381212H	3/4 in.	C-4	ERC-125	1-1/4 in.	C-3	OSP-125R	1-1/4 in.	F-2	SC-075	3/4 in.	F-4
880-61001	—	G-2	ERC-200	2 in.	C-3	OSP-150	1-1/2 in.	F-2	SC-100	1 in.	F-4
9889-0012	1/2 in.	G-3	ESC-075	3/4 in.	B-3	OSP-150R	1-1/2 in.	F-2	SC-125	1-1/4 in.	F-4
9889-0012G	1/2 in.	G-3	ESC-100	1 in.	B-3	OSP-200	2 in.	F-2	SC-150	1-1/2 in.	F-4
9889-0012S	1/2 in.	G-3	HLC-050	1/2 in.	A-6	OSP-200R	2 in.	F-2	SC-200	2 in.	F-4
9889-0034	3/4 in.	G-3	KOS-050	1/2 in.	D-4	PICC-050	1/2 in.	A-6	SC-250	2-1/2 in.	F-4
9889-0034S	3/4 in.	G-3	KOS-075	3/4 in.	D-4	PICC-075	3/4 in.	A-6	SC-300	3 in.	F-4
9889-0100	1 in.	G-3	KOS-100	1 in.	D-4	RB-100075	1 × 3/4 in.	C-5	SCCC-038	3/8 in.	A-6
9889-0112B	1-1/2 in.	G-3	KOS-125	1-1/4 in.	D-4	RB-125100	1-1/4 × 1 in.	C-5	SLT-050N	1/2 in.	A-7
9889-0114	1-1/4 in.	G-3	KOS-200	2 in.	D-4	RB-200125	2 × 1-1/4 in.	C-5	SLT-075N	3/4 in.	A-7
9889-0200	2 in.	G-3	LN-250	2-1/2 in.	D-2	RT-50	1/2 in.	C-3	SLT-100N	1 in.	A-7
ALT-050N	1/2 in.	A-7	LN-300	3 in.	D-2	RT-75	3/4 in.	C-3	SLT-125I	1-1/4 in.	A-7
ALT-075I	3/4 in.	A-7	MCB-075	3/4 in.	F-4	RT-100	1 in.	C-3	TSP-125R	1-1/4 in.	F-3
ALT-075N	3/4 in.	A-7	MHS-104	1/4 in.	F-4	RT-125	1-1/4 in.	C-3	TSP-200R	2 in.	F-3
ALT-100N	1 in.	A-7	MHZ-50	1/2 in.	A-4	RT-150	1-1/2 in.	C-3	TSP-250R	2-1/2 in.	F-3
ASC-075	3/4 in.	A-4				RT-200	2 in.	C-3	XC-075	3/4 in.	A-5
ASC-100	1 in.	A-4				RTC-50	1/2 in.	C-2	XC-100	1 in.	A-5
ASC-125	1-1/4 in.	A-4				RTC-75	3/4 in.	C-2	XK-075	3/4 in.	A-5
CH-050	1/2 in.	F-3				RTC-100	1 in.	C-2	XK-100	1 in.	A-5
CH-075	3/4 in.	F-3				RTC-125	1-1/4 in.	C-2			
CH-100	1 in.	F-3				RTC-150	1-1/2 in.	C-2			

Order by catalog number

(307) 206-0534 · conversionstech.com

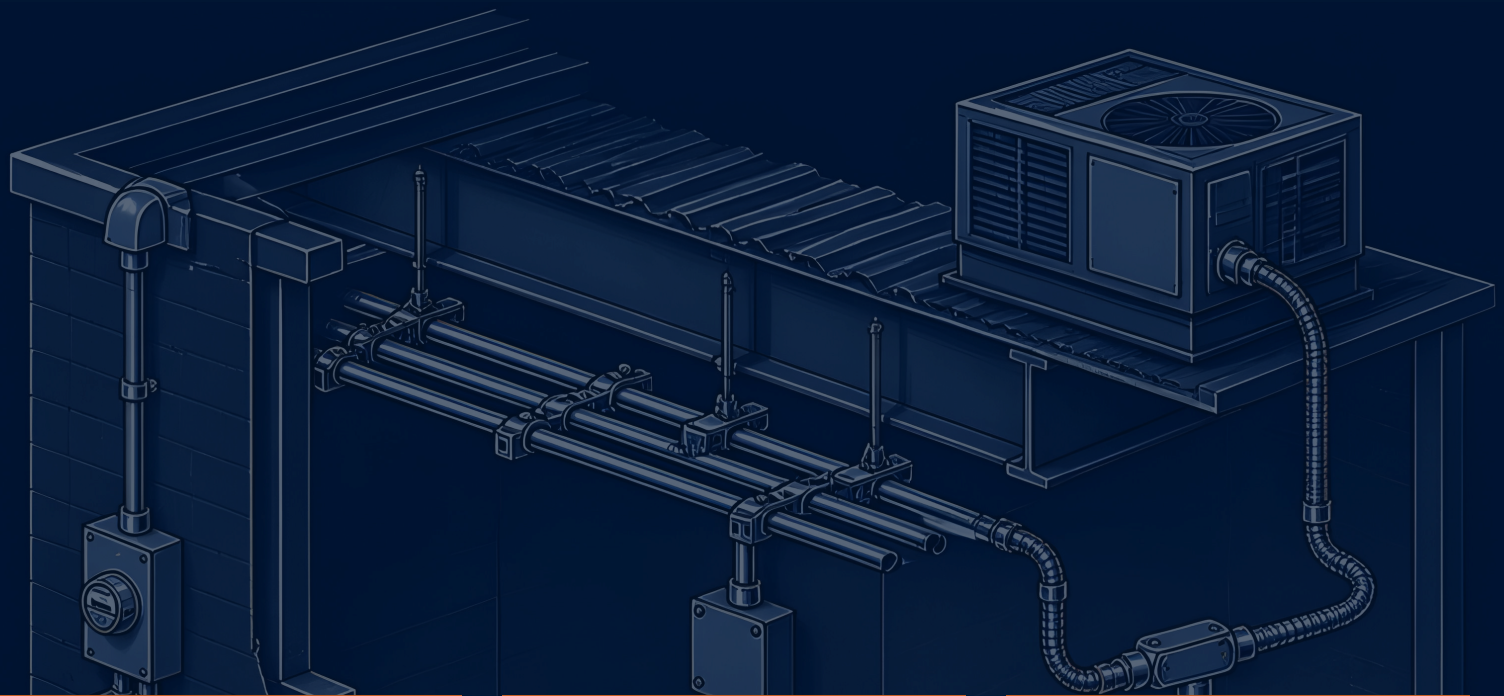

01

Find the family

Start at the contents and fitting selector on page iii. Have a competitor number? The cross index starts on page X-1.

02

Pick the catalog number

Every table lists trade size, fit, pack quantity and crosses. The catalog number is the store SKU.

03

Order

Order at conversionstech.com or call (307) 206-0534. Same-day shipping on in-stock items.
cs@conversionstech.com
Mail: 41 S. Wake Forest Ave. #3129,
Ventura CA 93003 · Oxnard, CA

Competitor names and part numbers are trademarks of their owners and are listed for reference only. Verify suitability before substitution. Specifications are subject to change; the listing on conversionstech.com governs. UL listings are held by the manufacturer; the standard for each product is on its conversionstech.com page. CT-30 Rev C · 10/2026

CT-30

Conduit fittings, bodies, straps, boxes and glands for EMT, IMC and rigid conduit

COMMERCIAL CONSTRUCTION

INDUSTRIAL & PLANT

SERVICE & UTILITY